

# EMERGENCY PACK MANUAL TESTING 50V-200V

Tuotenro: 0046602

**SYLVANIA**


**PRO**<sup>TM</sup>



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (Vf) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm<sup>2</sup>. NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

## Tekniset ominaisuudet

### Mitat (mm)

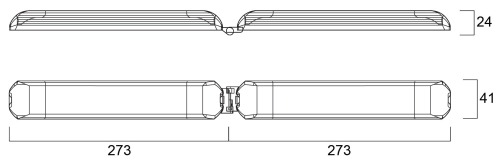

### Valonjakotiedostot

# EMERGENCY PACK MANUAL TESTING 50V-200V

Tuotenro: 0046602

**SYLVANIA**

## Perustiedot

Tuotenimi	EMERGENCY PACK MANUAL TESTING 50V- 200V
Teknologia	Emergency Pack
Ympäristö	Sisävalaistus
Käyttökohteet	Opetustilat, Hotellit ja ravintolat, Toimistot, Myymälät
ETIM-luokka	EC000471
Takuu	3 vuotta

## Rakennetiedot

Paino (kg) | 0.47

## Pakkaustiedot

EAN-koodi	5410288466026
Yksittäispakkauksen pituus / korkeus (cm)	28.5
Yksittäispakkauksen leveys (cm)	10.0
Yksittäispakkauksen syvyys (cm)	4.5
DUN14 (tukkupakkaus 1)	05410288466026
Kappalemäärä tukkupakkaus 1	1
Kappalemäärä tukkupakkaus 2	25
Tukkupakkaus 2 pituus / korkeus (cm)	46.0
Tukkupakkaus 2 leveys (cm)	31.0
Tukkupakkaus 2 syvyys (cm)	30.0

## Turvallisuustiedot

Käyttö vain kuivissa tiloissa | Kyllä