


Pixo Line 1500 90D Beam 830 Black

Artikelnummer 0007823

SYLVANIA


PROTM

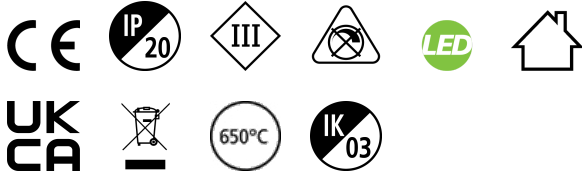

Pixo Line is a linear track system, adds flexibility to any space due the variety of product optionsOffers an easy installation with two separate modulesPush-in/push-out mechanism with GR6d-15 connectorCompatible with Zhaga Book 14Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90°Textured black finishing colour.Light color temperature: 3000K, warm white, max. system power: 50WMax. fixture lumen output: 7200lm, efficacy: 144lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiationMultipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA)Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrackElectrical protection: Class III. Degree of protection: IP20, suitable for indoor environment onlyLight modules should be combined with suitable in-track driversNominal product dimensions: L.1464mmx38.4mmx 37mm

Technische Werte

Größe (mm)

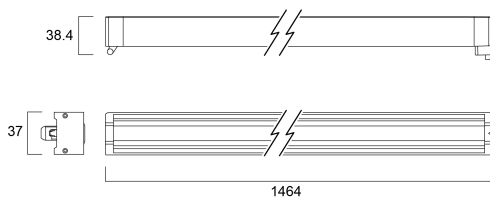

Photometrie

0.5	1.01	810°	45.2°	8347
	1.98	810°	51.2°	1402
1.0	2.01	810°	45.2°	2087
	2.77	810°	51.2°	356
1.5	3.02	810°	45.2°	807
	4.16	810°	51.2°	153
2.0	4.03	810°	45.2°	592
	5.55	810°	51.2°	92
2.5	5.04	810°	45.2°	394
	6.83	810°	51.2°	33
3.0	6.04	810°	45.2°	221
	8.32	810°	51.2°	23


Distance [m] Cone diameter [m] Illuminance [lx]

— C2 - C180 (Half beam angle: 105.4°)
— C50 - C270 (Half beam angle: 90.4°)

Pixo Line 1500 90D Beam 830 Black

Artikelnummer 0007823

SYLVANIA



Allgemeine Daten

Produktname	Pixo Line 1500 90D Beam 830 Black
Technologie	LED
Sockel	N/A
Montage	Track mounting
Allgemeine Anwendungsbereiche	Hospitality, Museums & Galleries, Office, Retail
Umgebungstemperaturbereich	-20°C...+40°C
ETIM Klasse	EC000996
E-Nummer FI	4279405
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	7200
Systemeffizienz (lm/W)	144
Farbtemperatur (K)	3000
Lichtfarbe	Warm White
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	90
Blendungsbegrenzung	< 28
Photobiological Risk Group	Not applicable

Elektrische Daten

Leistungsaufnahme gesamt (W)	50
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Elektrische Schutzklasse	Class III
Dimmbar	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C
Nennfrequenz (Hz)	N/A

Lifetime data

Lebensdauer - L70B50	90000
Lebensdauer - L70B20	90000
Lebensdauer - L70B10	90000
Lebensdauer - L80B50	90000
Lebensdauer - L80B20	79000
Lebensdauer - L80B10	76000
Lebensdauer - L90B50	43000
Lebensdauer - L90B20	37000
Lebensdauer - L90B10	36000

Pixo Line 1500 90D Beam 830 Black

Artikelnummer 0007823

SYLVANIA

Physikalische Daten

Gehäusefarbe	Black
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	1464
Breite (mm)	37
Nominale Produkthöhe (mm)	38.4
Gewicht (kg)	0.9

Packaging

EAN Code	5410288078236
Einzelverpackung Länge (cm)	147.0
Einzelverpackung Breite (cm)	4.3
Einzelverpackung Tiefe (cm)	4.3
DUN 14 (außen)	15410288078233
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	149.0
Außenverpackung Breite (cm)	24.0
Außenverpackung Tiefe (cm)	11.0

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40