

# Pixo Line 1500 D Asym 840 Black

Artikelnummer 0007834

**SYLVANIA**


**PRO**<sup>TM</sup>



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, traslucent double asymmetric optic diffuser, light beam angle:25° black finishing colour. Light color temperature: 4000K, max. system power: 50W Max. fixture lumen output: 7600lm, efficacy: 152lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx37mm

## Technische Werte

### Größe (mm)

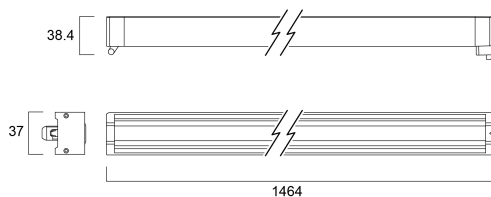

### Photometrie


Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.80 1.45	0.07 0.08 0.09	4025 2863 2455
1.0	1.59 2.90	0.07 0.08 0.09	1106 913 751
1.5	2.39 4.35	0.07 0.08 0.09	482 405 345
2.0	3.18 5.80	0.07 0.08 0.09	277 232 195
2.5	3.96 7.25	0.07 0.08 0.09	177 148 124
3.0	4.77 8.70	0.07 0.08 0.09	133 111 91

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 110.0°)  
 — C90 - C270 (Half beam angle: 77.0°)

# Pixo Line 1500 D Asym 840 Black

Artikelnummer 0007834

**SYLVANIA**

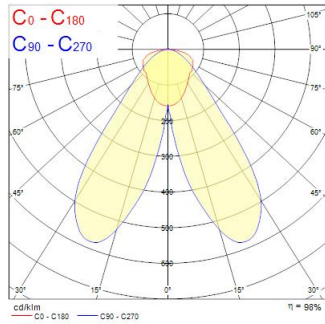

## Allgemeine Daten

Produktname	Pixo Line 1500 D Asym 840 Black
Technologie	LED
Sockel	N/A
Montage	Track mounting
Allgemeine Anwendungsbereiche	Retail, Hospitality, Museums & Galleries, Office
Umgebungstemperaturbereich	-20°C...+40°C
ETIM Klasse	EC000996
Garantie	5 Jahre

## Optische Daten

Leuchtenlichtstrom (lm)	7600
Systemeffizienz (lm/W)	152
Farbtemperatur (K)	4000
Lichtfarbe	Neutral White
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	25
Blendungsbegrenzung	< 25
Photobiological Risk Group	Not applicable

## Elektrische Daten

Leistungsaufnahme gesamt (W)	50
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Elektrische Schutzklasse	Class III
Dimmbar	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	D
Nennfrequenz (Hz)	N/A

## Lifetime data

Lebensdauer - L70B50	90000
Lebensdauer - L70B20	90000
Lebensdauer - L70B10	90000
Lebensdauer - L80B50	90000
Lebensdauer - L80B20	79000
Lebensdauer - L80B10	76000
Lebensdauer - L90B50	43000
Lebensdauer - L90B20	37000
Lebensdauer - L90B10	36000

# Pixo Line 1500 D Asym 840 Black

Artikelnummer 0007834

**SYLVANIA**

## Physikalische Daten

Gehäusefarbe	Black
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	1464
Breite (mm)	37
Nominale Produkthöhe (mm)	38.4
Gewicht (kg)	0.9

## Packaging

EAN Code	5410288078342
Einzelverpackung Länge (cm)	147.0
Einzelverpackung Breite (cm)	4.3
Einzelverpackung Tiefe (cm)	4.3
DUN 14 (außen)	15410288078349
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	149.0
Außenverpackung Breite (cm)	24.0
Außenverpackung Tiefe (cm)	11.0

## Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40