
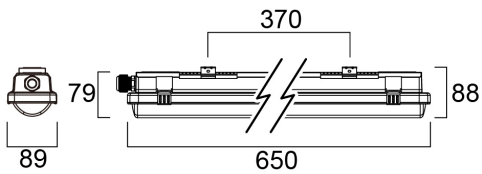


PROTM

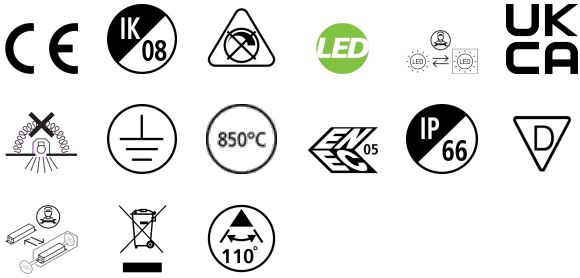

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.25	Ø1.1	239
	1.33	Ø1.2	201
1.0	2.51	Ø1.1	598
	2.65	Ø1.2	518
1.5	3.76	Ø1.1	268
	3.98	Ø1.2	232
2.0	5.01	Ø1.1	148
	5.31	Ø1.2	128
2.5	6.26	Ø1.1	88
	6.64	Ø1.2	75
3.0	7.52	Ø1.1	58
	7.96	Ø1.2	50

Distance [m] Cone diameter [m] Beam diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 106.0°)
— C90 - C270 (Half beam angle: 102.9°)

