


LiteGuard™



Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.82	8749
	0.82	2244
	0.82	2039
1.0	1.65	2107
	1.65	534
	1.65	510
1.5	2.47	972
	2.47	224
	2.47	207
2.0	3.30	547
	3.30	138
	3.30	127
2.5	4.12	360
	4.12	81
	4.12	82
3.0	4.95	243
	4.95	58
	4.95	57

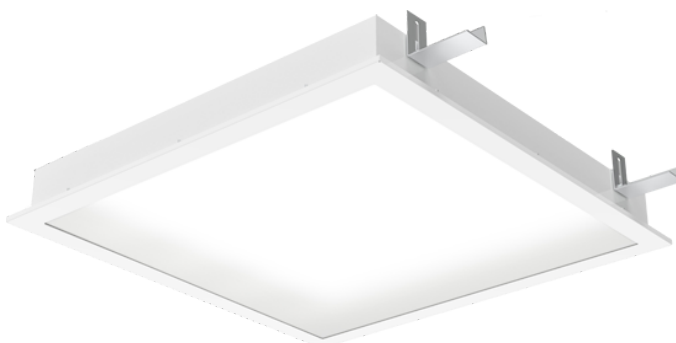