


OptiClip 600 3000K C8 WH CC WHITE

Artikelnummer 0044008

SYLVANIA


PROTM

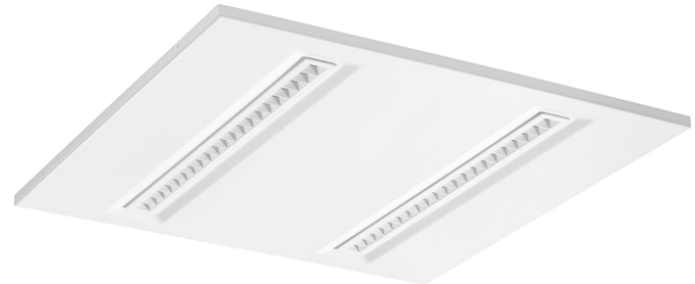

OPTICLIP 600 3000K C8 WH CC WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, Constant Current driver, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Technische Werte

Größe (mm)

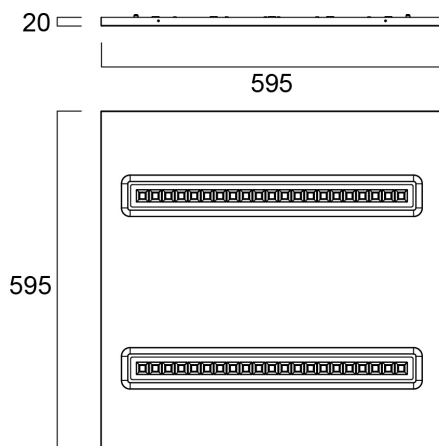

Photometrie

Distance [m]	Cone diameter [m]	E170 E170K E170C	E180 E180K E180C	E270 E270K E270C	Flux [lm]
0.5	0.84 0.92	401° 39.9°	401° 39.9°	401° 39.9°	7270 1930 1930
1.0	1.68 1.65	401° 39.9°	401° 39.9°	401° 39.9°	1830 455 455
1.5	2.53 2.47	401° 39.9°	401° 39.9°	401° 39.9°	809 191 191
2.0	3.37 3.30	401° 39.9°	401° 39.9°	401° 39.9°	455 112 112
2.5	4.21 4.12	401° 39.9°	401° 39.9°	401° 39.9°	291 65 65
3.0	5.05 4.95	401° 39.9°	401° 39.9°	401° 39.9°	202 47 47

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.9°) — C90 - C270 (Half beam angle: 80.2°)

