


PROTM



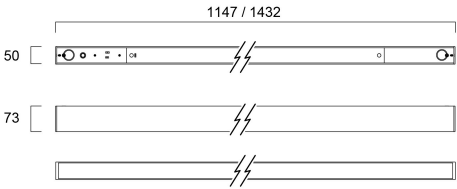

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.47 1.23	5071 5071 5071
1.0	2.93 2.47	1233 1233 1233
1.5	4.40 3.70	538 538 538
2.0	5.86 4.94	301 301 301
2.5	7.33 6.17	192 192 192
3.0	8.80 7.41	134 134 134

Distance [m] Cone diameter [m]
— C0 - C180 (half beam angle: 102.2°)
— C90 - C270 (half beam angle: 111.4°)

