


START Track Spot L DALI 3250lm 930 WB White


Item No: 0004928

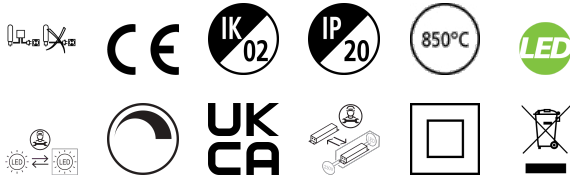

Spotlight for track mounting, decorative heat sink, white (RAL 9016) housing, equipped with Global GAC69 Pulse Adaptor, 3260 Lm, 36 W, 91 Lm/W, 3000 K, drive current: 900 mA, CRI 90, 52° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 240 x 164 mm.

Technical Assets


Dimensions (mm)

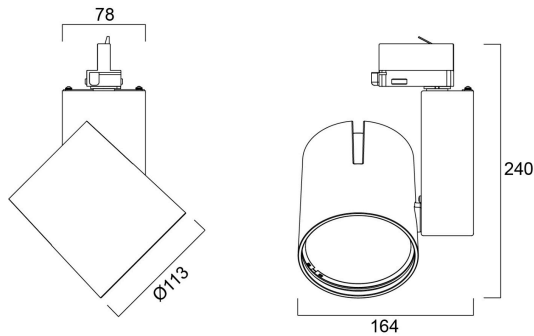

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.48	0.071	16214
		E100	5960
1.0	0.96	0.071	4079
		E100	1490
1.5	1.44	0.071	1813
		E100	960
2.0	1.93	0.071	1020
		E100	579
2.5	2.41	0.071	650
		E100	340
3.0	2.89	0.071	480
		E100	198

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 51.4°)

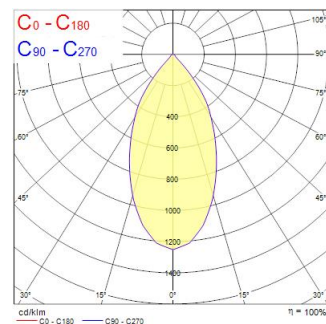

START Track Spot L DALI 3250lm 930 WB White

Item No: 0004928

SYLVANIA

General data

Product name	START Track Spot L DALI 3250lm 930 WB White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Retail
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number SE	7426201
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3260
Luminaire efficacy (lm/W)	91
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	52
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	36
Supply current (A)	0.15
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	900
Inrush Current (A)	20
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	33
Max. products per 16A C Breaker	55
Max. products per 10A B Breaker	33
Max. products per 16A B Breaker	55

Lifetime data

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	79500
Lifespan L90 B50	69500
Lifespan L90 B20	54500
Lifespan L90 B10	47500

START Track Spot L DALI 3250lm 930 WB White

Item No: 0004928

SYLVANIA

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Width (mm)	164
Nominal Product Height (mm)	240
Weight (kg)	1.368

Packaging

Product EAN number	5410288049281
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05410288049281
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	1-25
Dry applications use only	Yes