

ToLEDo Superia T5 AC V2 5FT 2800LM 840

Item No: 0029258


SYLVANIA



50,000 hours average rated lifetime. Last 2.5 times longer than 35W 1449mm fluorescent tri-phosphor T5 lamp. High switching cycles - 200,000X. Omni-directional light distribution and wide beam angle. Minimum and maximum operating temperature: -20°C to 50°C. Glass construction and polycarbonate end-caps. Only suitable for direct mains (AC 220-240V) operation. Ideal for factories, parking lots, supermarkets, department stores, schools and offices. Not suitable for operation with electronic/ECG or magnetic/CCG ballasts.

Technical Assets

Dimensions (mm)

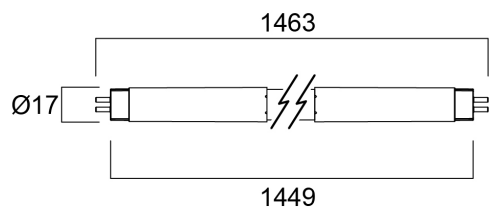

Photometrics

ToLEDo Superia T5 AC V2 5FT 2800LM 840

Item No: 0029258

SYLVANIA

General data

Product name	ToLEDo Superia T5 AC V2 5FT 2800LM 840
Technology	LED
Watt (Rated) (W)	18.5
Lamp shape	Tube, double-ended
Cap/Base	G5
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
E-number FI	4940790
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	2800
Luminous flux (Rated) (lm)	2800
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	18.5
Wattage (W)	18.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	28.7
Inrush Duration (μ s)	3
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	97
Max. products per 20A C Breaker	120
Max. products per 10A B Breaker	60
Max. products per 13A B Breaker	79
Max. products per 16A B Breaker	97

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

IP rating	IP20
Nominal Product Length (mm)	1462
Nominal Product Diameter (mm)	17
Weight (kg)	0.17

ToLEDo Superia T5 AC V2 5FT 2800LM 840

Item No: 0029258



Packaging

Product EAN number	5410288292588
Packaging single length / height (cm)	146.2
Packaging single width (cm)	1.8
Packaging single depth (cm)	1.8
DUN14 (inner)	15410288292585
Units per outer package	10
Packaging outer length / height (cm)	152.1
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	7.8

Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture