

# TOLEDO STICK 500LM 840 E27 SL

Item No: 0029927

**SYLVANIA**




- A bright, all-around lighting solution for living rooms, wall lights, ceiling lights, compact and decorative luminaires
- Quick and easy replacement of 40W incandescent lamp • 15,000H average rated life – last 15X longer than incandescent/halogen lamps • 87% energy savings compared to incandescent • Last 50% longer and consume 45% less energy compared to compact fluorescent integrated lamps • A++ energy rating • 100 lm/W • Omni-directional light distribution • Non-dimmable

## Technical Assets

Dimensions (mm)

**E27**

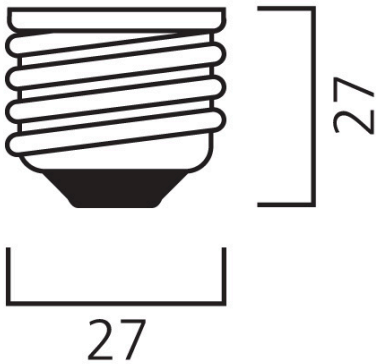

Photometrics

# TOLEDO STICK 500LM 840 E27 SL

Item No: 0029927

**SYLVANIA**

## General data

|  |  |
|--|--|
| Product name                               | TOLEDO STICK 500LM<br>840 E27 SL       |
| Technology                                 | LED                                    |
| Watt (Rated) (W)                           | 6                                      |
| Cap/Base                                   | E27                                    |
| Fixture rating                             | Open                                   |
| General application                        | Hospitality, Residential<br>& Consumer |
| Performance ambient temperature Tq<br>(°C) | 25                                     |
| ETIM Class                                 | EC001959                               |
| E-number FI                                | 4740648                                |
| Warranty                                   | 3 years                                |

## Optical data

|   |            |
|---|------------|
| Useful luminous flux ( $\Phi_{use}$ )           | 500        |
| Luminous flux (Rated) (lm)                      | 500        |
| Correlated colour temperature (k)               | 4000       |
| Light colour                                    | Cool White |
| CRI (Ra)  | 80         |
| Beam Angle (°)                                  | 240        |
| Lumen maintenance at end of<br>nominal life (%) | 70         |

## Electrical data

|  |         |
|--|---------|
| Power consumption (W)                                | 6       |
| Wattage (W)  | 6       |
| Starting time (max) (s)                              | 0.5     |
| Warm-up time to 60% of full light<br>(max) (s)       | 0.5     |
| Lamp power factor                                    | 0.5     |
| No. Of switching cycles before<br>premature failures | >50000  |
| Inrush Current (A)                                   | 2.01    |
| Nominal Frequency (Hz)                               | 50/60Hz |
| Max. products per 10A C Breaker                      | 25      |
| Max. products per 16A C Breaker                      | 40      |
| Max. products per 20A C Breaker                      | 50      |

## Lifetime data

|                            |       |
|----------------------------|-------|
| Average life (Nominal) (h) | 15000 |
| Average life (Rated) (h)   | 15000 |

## Physical data

|                               |       |
|-------------------------------|-------|
| Nominal Product Length (mm)   | 112   |
| Nominal Product Diameter (mm) | 37    |
| Weight (kg)                   | 0.042 |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288299273  |
| Packaging single length / height (cm) | 11.7           |
| Packaging single width (cm)           | 4.0            |
| Packaging single depth (cm)           | 4.0            |
| DUN14 (inner)                         | 15410288299270 |
| Units per inner package               | 10             |
| Packaging inner length / height (cm)  | 21.5           |
| Packaging inner width (cm)            | 9.0            |
| Packaging inner depth (cm)            | 13.5           |
| DUN14 (outer)                         | 25410288299277 |
| Units per outer package               | 60             |
| Packaging outer length / height (cm)  | 29.2           |
| Packaging outer width (cm)            | 23.0           |
| Packaging outer depth (cm)            | 30.0           |

## Safety data

|                                     |   |
|-------------------------------------|---|
| Breakage cleaning instructions      | Not applicable                                |
| Special purpose lamp                | No  |
| Dry applications use only           | Yes   |
| Suitable for household illumination | Yes   |
| Safety message                      | Not Suitable for totally<br>enclosed fixtures |