

Sylvania Granit IP65 0-10V 12500-20600lm 865 WB Z18

Item No: 0039123

SYLVANIA


PROTM



Interior LED Highbay, comes complete with 1500mm flying lead, hook for hanging and 1200mm chain with carabiners, Traffic black (RAL9017) aluminium housing with PC lens, IP65, IK08, Class I, 6500K, CRI80, 0-10V dimmable, 12,500 / 16,500 / 20,600lm (3 different steps selectable with DIP switches), 62 / 82 / 103W, 202 / 201 / 200lm/W depends on setting, Symmetrical Wide beam (85°), 105.000hrs L80B50 lifespan, 298 x 182mm (D x H) dimensions, 2.22kg weight, operating temperature range from -30 to +50°C, Zhagabook 18 socket in the center.

Technical Assets

Dimensions (mm)

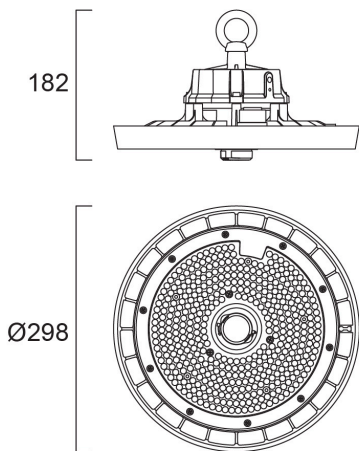


Photometrics

0.5	0.85 0.81	E171 E180 E180	3477 1742 897
1.0	1.70 1.63	E171 E180 E180	8819 4407 2254
1.5	2.54 2.44	E171 E180 E180	3531 1762 904
2.0	3.39 3.25	E171 E180 E180	2185 1098 569
2.5	4.24 4.06	E171 E180 E180	1379 686 355
3.0	5.09 4.88	E171 E180 E180	895 454 238

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 75.2°)
— C90 - C270 (half beam angle: 50.6°)



Sylvania Granit IP65 0-10V 12500-20600lm 865 WB Z18

Item No: 0039123



General data

Product name	Sylvania Granit IP65 0-10V 12500-20600lm 865 WB Z18
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
E-number FI	4357197
Warranty	5 years

Optical data

Fixture luminous flux (lm)	20600
Luminaire efficacy (lm/W)	200
Correlated colour temperature (k)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	1200

Electrical data

Emergency type	
Total power consumption (W)	103
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	0-10V
Inrush Current (A)	90
Inrush Duration (µs)	300
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	17
Max. products per 13A C Breaker	22
Max. products per 16A C Breaker	27
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	16
Max. products per 20A B Breaker	21
Connectable conductor cross section - Min (mm²)	1
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B50	105000
Lifespan L80 B20	91000

Sylvania Granit IP65 0-10V 12500-20600lm 865 WB Z18

Item No: 0039123



Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Diffuser material	PC Polycarbonate
Reflector finish	Matt
Nominal Product Height (mm)	182
Nominal Product Diameter (mm)	298
Weight (kg)	2.22

Packaging

Product EAN number	5410288391236
Packaging single length / height (cm)	34.5
Packaging single width (cm)	32.6
Packaging single depth (cm)	16.0
DUN14 (inner)	05410288391236
Units per outer package	1
Packaging outer length / height (cm)	34.5
Packaging outer width (cm)	32.6
Packaging outer depth (cm)	16.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-30-50