

# OTAO LINEAR CEILING ROSE BK 6-PIN

Item No: 0040828

**SYLVANIA**

**PRO**<sup>TM</sup>




**UK  
CA**



Ceiling rose incl 2m 6-pin power cable for OTAO DALI EM luminaires. RAL9011 (black) finishing.

## Technical Assets

### Dimensions (mm)

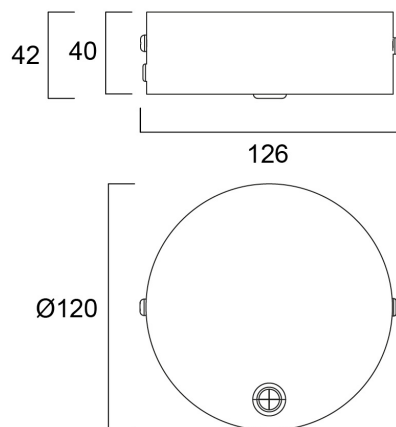

### Photometrics

# OTAO LINEAR CEILING ROSE BK 6-PIN

Item No: 0040828

**SYLVANIA**

## General data

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Product name                     | OTAO LINEAR CEILING ROSE BK 6-PIN |
| Technology                       | Non - Electrical Device           |
| Type of accessory                | Ceiling cup                       |
| Housing                          | Steel                             |
| Mount                            | Suspended                         |
| Built in presence detector       | NONE                              |
| General application              | Office, Education                 |
| Operating temperature range (°C) | 5°C...+50°C                       |
| ETIM Class                       | EC002557                          |
| Warranty                         | 5 years                           |

## Optical data

|                                 |                |
|---------------------------------|----------------|
| Colour Variation Initial (SDCM) | N/A            |
| Photobiological Risk Group      | Not applicable |

## Electrical data

|                       |           |
|-----------------------|-----------|
| Emergency type        |           |
| Electrical protection | Class III |

## Physical data

|                               |                           |
|-------------------------------|---------------------------|
| Housing colour                | RAL 9011 - Graphite black |
| IP rating                     | OTHER                     |
| IK rating                     | IK03                      |
| Diffuser finish               | Other                     |
| Nominal Product Diameter (mm) | 120                       |
| Weight (kg)                   | 0.3                       |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288408286  |
| Packaging single length / height (cm) | 13.9           |
| Packaging single width (cm)           | 12.3           |
| Packaging single depth (cm)           | 11.8           |
| DUN14 (inner)                         | 15410288408283 |
| Units per outer package               | 20             |
| Packaging outer length / height (cm)  | 64.3           |
| Packaging outer width (cm)            | 29.7           |
| Packaging outer depth (cm)            | 19.4           |

## Safety data

|                                  |      |
|----------------------------------|------|
| Glow Wire Test (°C)              | 650  |
| Optimal operating condition (°C) | 5-50 |