


RANA HELIOS R 600 2L LOUV+PRI DALI

Item No: 0044990

SYLVANIA


PROTM

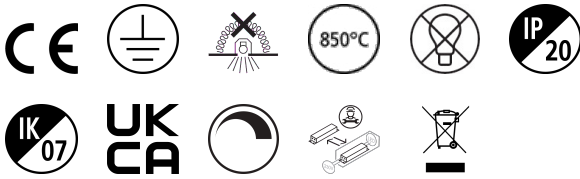

Ceiling recessed luminaire, dimensions: 595 x 595 x 52mm, white (RAL9016) coated body, satin aluminium reflector (double symmetrical light distribution), for 2 x Helios LED T5 lamps (lamps not included), DALI dimmable LED driver, low LED flicker (+/-5%), 150mA drive current, push-in connector, IP20, IK07

Technical Assets


Dimensions (mm)

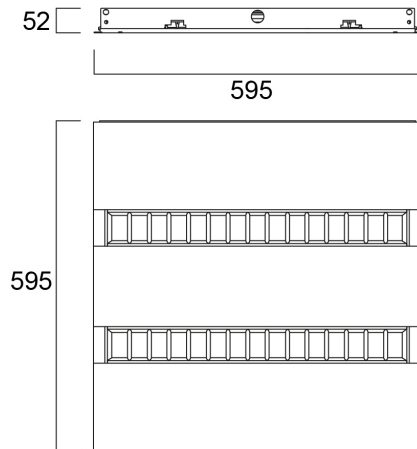

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.29 1.06	0.07	0.23'	1035 1395 3085
1.0	2.59 2.12	0.07	0.83'	2548 523' 339
1.5	3.88 3.18	0.07	1.25'	1176 523' 191
2.0	5.18 4.24	0.07	1.67'	662 523' 130
2.5	6.47 5.31	0.07	2.09'	423 523' 84
3.0	7.76 6.37	0.07	2.51'	284 523' 58

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 90.4°)
 — C90 - C270 (Half beam angle: 104.9°)



RANA HELIOS R 600 2L LOUV+PRI DALI

Item No: 0044990

SYLVANIA

General data

Product name	RANA HELIOS R 600 2L LOUV+PRI DALI
Technology	Light Source Not Integrated
Cap/Base	G5
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	141
Correlated colour temperature (k)	4000
Light colour	N/A
CRI (Ra)	85
Colour Variation Initial (SDCM)	N/A
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Light source included	Fixture without Lightsource
Emergency type	
Total power consumption (W)	22
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	150
Inrush Current (A)	23
Inrush Duration (µs)	174
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

Lifetime data

Lifespan L70 B50	75000
Lifespan L80 B50	50000

RANA HELIOS R 600 2L LOUV+PRI DALI

Item No: 0044990

SYLVANIA

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	52
Weight (kg)	4.5

Packaging

Product EAN number	5410288449906
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05410288449906
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25