


START



Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.22	50.7"	280
	2.14	89.2"	115
1.0	2.44	96.7"	76
	4.29	96.7"	23
1.5	3.67	96.7"	33
	6.43	96.7"	13
2.0	4.89	96.7"	19
	8.58	96.7"	7
2.5	6.11	96.7"	12
	10.72	96.7"	5
3.0	7.33	96.7"	8
	12.87	96.7"	3

Distance [m] Cone diameter [m] Beam diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 130.0°)
 — C90 - C270 (Half beam angle: 101.4°)

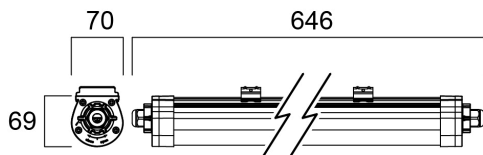