


# START PANEL HO 625 3000K DALI G4

Item No: 0047794


**SYLVANIA**

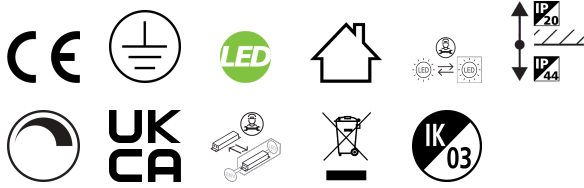

LED back-lit recessed panel, 3000K Warm White, 4500lm delivered from 36W, 125lm/W total system efficiency, energy efficient external DALI dimmable tridonic driver, even distribution of light throughout fixture, Average lifespan: 100.000Hrs, size (HxWxD) 620x620x65mm.


## Technical Assets

### Dimensions (mm)

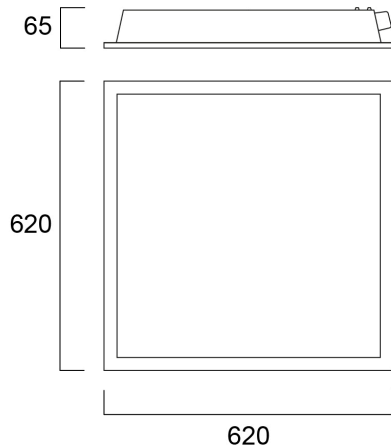

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]
0.5	1.57 1.49	0.71 0.67	2'3"	2'7"	6270 487 521
1.0	3.14 2.99	1.42 1.34	4'6"	4'5"	1568 132 138
1.5	4.71 4.48	2.13 2.02	6'9"	6'4"	697 54 61
2.0	6.28 5.96	2.84 2.71	8'2"	8'0"	390 203 22
2.5	7.85 7.47	3.55 3.38	9'5"	9'2"	281 118 27
3.0	9.42 8.96	4.26 4.04	10'8"	10'4"	174 14 15

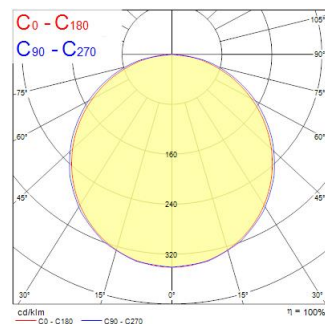

# START PANEL HO 625 3000K DALI G4

Item No: 0047794

**SYLVANIA**

## General data

Product name	START PANEL HO 625 3000K DALI G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	0°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

## Electrical data

Total power consumption (W)	36
Lamp power factor	0.96
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	150
Inrush Current (A)	25
Inrush Duration (µs)	177
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	60
Max. products per 20A C Breaker	75

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	620
Nominal Product Width (mm)	620
Nominal Product Height (mm)	63
Weight (kg)	3.3

# START PANEL HO 625 3000K DALI G4

Item No: 0047794



## Packaging

Product EAN number	5410288477947
Packaging single length / height (cm)	63.5
Packaging single width (cm)	63.0
Packaging single depth (cm)	7.5
DUN14 (inner)	05410288477947
Units per outer package	20
Packaging outer length / height (cm)	129.0
Packaging outer width (cm)	81.0
Packaging outer depth (cm)	65.0

## Safety data

Optimal operating condition (°C)	0-40
----------------------------------	------