


# VELITE WALL ADJUST BK UP AND DOWN 3000K

Item No: 0047813


**SYLVANIA**

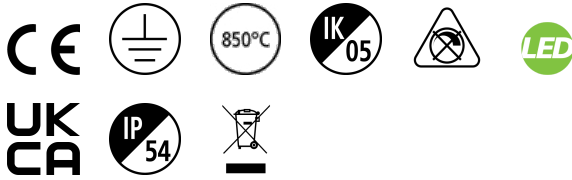


Adjustable surface wall up and down light luminaire, black aluminium, 290lm, 5W, 58lm/W, 3000K, Driver Current: 700mA, CRI:80+, 220-240V, IP54, IK05, 30.000 hrs (L70), 108x108x109mm

## Technical Assets

### Dimensions (mm)

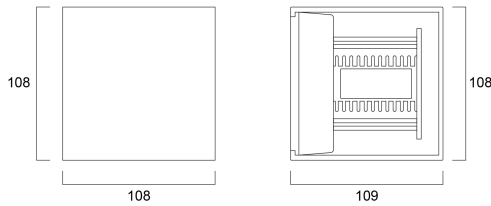

### Photometrics

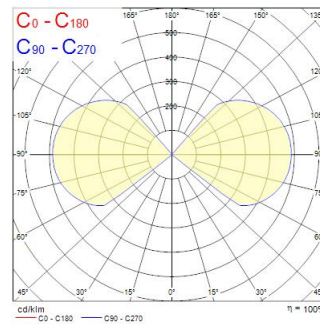

# VELITE WALL ADJUST BK UP AND DOWN 3000K

Item No: 0047813

**SYLVANIA**

## General data

Product name	VELITE WALL ADJUST BK UP AND DOWN 3000K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	External
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579191
E-number SE	7703127
Warranty	3 years

## Optical data

Fixture luminous flux (lm)	290
Luminaire efficacy (lm/W)	58
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Beam Angle (°)	94
Distribution type	Direct
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	5
Supply current (A)	0.03
Lamp power factor	0.7
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Drive current (mA)	700
Inrush Current (A)	10.3
Inrush Duration (µs)	300
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	35
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	30

## Lifetime data

Lifespan L70 B50	30000
Lifespan L80 B50	20000
Lifespan L90 B50	12000

## Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK05
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	108
Nominal Product Width (mm)	108
Nominal Product Height (mm)	109
Weight (kg)	0.797

# VELITE WALL ADJUST BK UP AND DOWN 3000K

Item No: 0047813



## Packaging

Product EAN number	5410288478135
Packaging single length / height (cm)	14.6
Packaging single width (cm)	14.6
Packaging single depth (cm)	14.6
DUN14 (inner)	15410288478132
Units per outer package	8
Packaging outer length / height (cm)	60.6
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	16.9

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-45