


# START WATERPROOF 1200 HOUSING 1X

Item No: 0047922

**SYLVANIA**


**START**<sup>TM</sup>

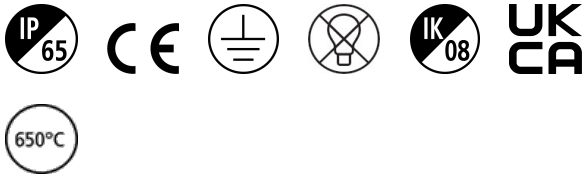

• Luminaire, polycarbonate housing • Single version, 1200mm • Protection type IP65 • Luminous flux and light colour vary depending on LED tubes used • To be used with T8 LED tubes • Easy to install with stainless steel fixing brackets included for ceiling mounting • Ideal for any industrial facilities, garages, car parks, workshops.

## Technical Assets

### Dimensions (mm)

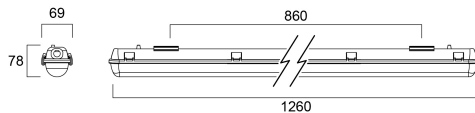

### Photometrics

### General data

|                                  |                                  |
|----------------------------------|----------------------------------|
| Product name                     | START WATERPROOF 1200 HOUSING 1X |
| Technology                       | Light Source Not Integrated      |
| Cap/Base                         | G13                              |
| Housing                          | PC Polycarbonate                 |
| Mount                            | Ceiling surface mounting         |
| Fixture rating                   | Enclosed                         |
| General application              | Logistics & Industry             |
| Operating temperature range (°C) | -20°C...+40°C                    |
| ETIM Class                       | EC002892                         |
| Warranty                         | 3 years                          |

### Optical data

LOR (%) | 75

### Electrical data

|                       |                             |
|-----------------------|-----------------------------|
| Light source included | Fixture without Lightsource |
| Electrical protection | Class I                     |

# START WATERPROOF 1200 HOUSING 1X

Item No: 0047922



## Physical data

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Grey             |
| IP rating                   | IP65             |
| IK rating                   | IK08             |
| Diffuser finish             | Transparent      |
| Diffuser material           | PC Polycarbonate |
| Nominal Product Length (mm) | 1260             |
| Nominal Product Width (mm)  | 69               |
| Nominal Product Height (mm) | 78               |
| Weight (kg)                 | 0.81             |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288479224  |
| Packaging single length / height (cm) | 128.0          |
| Packaging single width (cm)           | 6.9            |
| Packaging single depth (cm)           | 5.2            |
| DUN14 (inner)                         | 15410288479221 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 128.0          |
| Packaging outer width (cm)            | 6.9            |
| Packaging outer depth (cm)            | 5.2            |

## Safety data

|                                  |        |
|----------------------------------|--------|
| Glow Wire Test (°C)              | 650    |
| Optimal operating condition (°C) | -20-40 |