

# Start Flood Flat IP65 2850LM 830 Black

Item No: 0050113


**SYLVANIA**



The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2850 lm, 27 W, 106 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 123 x 156 x 28 mm (L x W x H). Weight: 0.51kg.

## Technical Assets


### Dimensions (mm)

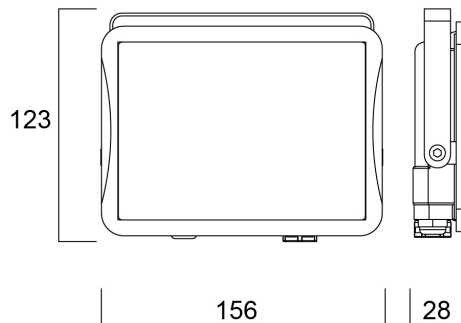

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.52 1.43	0.07 0.06	0.06 0.05	4232 354
1.0	3.03 2.87	0.14 0.13	0.12 0.11	1058 88
1.5	4.55 4.30	0.21 0.20	0.17 0.16	489 29
2.0	6.07 5.73	0.28 0.27	0.22 0.21	294 22
2.5	7.58 7.17	0.35 0.34	0.27 0.26	189 14
3.0	9.10 8.60	0.42 0.41	0.32 0.31	117 10

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 113.2°)  
 — C90 - C270 (Half beam angle: 113.2°)

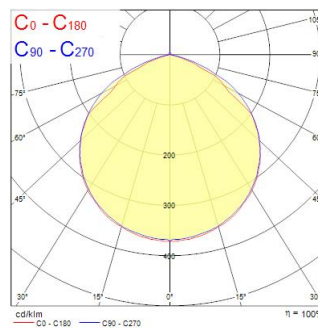

# Start Flood Flat IP65 2850LM 830 Black

Item No: 0050113

**SYLVANIA**

## General data

Product name	Start Flood Flat IP65 2850LM 830 Black
Technology	LED
Cap/Base	N/A
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579530
Warranty	3 years

## Optical data

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	106
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	60
Inrush Current (A)	19.6
Inrush Duration (µs)	390
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	16
Max. products per 13A C Breaker	20
Max. products per 16A C Breaker	26
Max. products per 20A C Breaker	32
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	12
Max. products per 16A B Breaker	15
Max. products per 20A B Breaker	19

## Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	73000
Lifespan L80 B20	47000

# Start Flood Flat IP65 2850LM 830 Black

Item No: 0050113

**SYLVANIA**

## Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK06
Nominal Product Length (mm)	123
Nominal Product Width (mm)	156
Nominal Product Height (mm)	28
Weight (kg)	0.51

## Packaging

Product EAN number	5410288501130
Packaging single length / height (cm)	16.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	17.5
DUN14 (inner)	15410288501137
Units per outer package	6
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	19.5

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40