

LED PIPE L1500 WW

Item No: 0051365


SYLVANIA




LED T5 replacement batten, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

Technical Assets

Dimensions (mm)

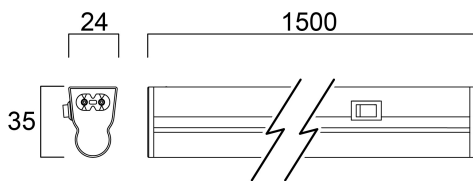

Photometrics

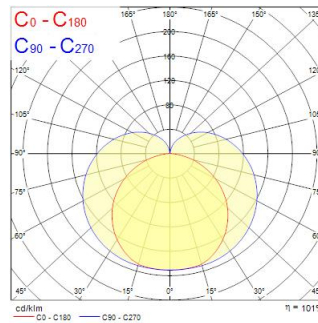

LED PIPE L1500 WW

Item No: 0051365

SYLVANIA

General data

Product name	LED PIPE L1500 WW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4278209
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1450
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	14.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.7
Electrical protection	Class II
Dimmable	No
Drive current (mA)	150
Inrush Current (A)	100
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	87
Max. products per 13A C Breaker	113
Max. products per 16A C Breaker	142
Max. products per 20A C Breaker	174
Max. products per 10A B Breaker	51
Max. products per 13A B Breaker	68
Max. products per 16A B Breaker	84
Max. products per 20A B Breaker	105

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	24
Nominal Product Height (mm)	35
Weight (kg)	0.213

LED PIPE L1500 WW

Item No: 0051365



Packaging

Product EAN number	5410288513652
Packaging single length / height (cm)	150.4
Packaging single width (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (inner)	15410288513659
Units per outer package	24
Packaging outer length / height (cm)	152.0
Packaging outer width (cm)	20.5
Packaging outer depth (cm)	21.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------