


RANA LINEAR R 3KLM NW LOUV+PRI D

Item No: 0052353

SYLVANIA


PROTM

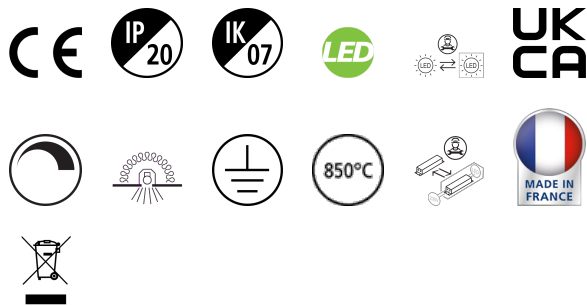

Ceiling recessed LED Linear luminaire with Louvre + Micro Prismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, DALI Dimmable (Switch-Dim), Neutral White LED (4000K), 3250lm, 27W, 120lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<19, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type

Technical Assets

Dimensions (mm)

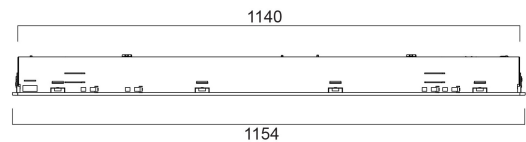


Photometrics

0.5	0.95 0.65	5171 5130 5130	43.8° 34.1° 34.1°	8189 1871 2352
1.0	1.90 1.35	2042 5171 5130	43.8° 34.1° 34.1°	390 390 853
1.5	2.85 2.03	908 5171 5130	43.8° 34.1° 34.1°	175 239
2.0	3.81 2.71	511 5171 5130	43.8° 34.1° 34.1°	96 146
2.5	4.76 3.39	327 5171 5130	43.8° 34.1° 34.1°	60 90
3.0	5.71 4.06	227 5171 5130	43.8° 34.1° 34.1°	44 66

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 65.2°)
— C90 - C270 (Half beam angle: 57.2°)



RANA LINEAR R 3KLM NW LOUV+PRI D

Item No: 0052353

SYLVANIA

General data

Product name	RANA LINEAR R 3KLM NW LOUV+PRI D
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail
Operating temperature range (°C)	-25°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	120
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	275
Inrush Current (A)	22.4
Inrush Duration (µs)	176
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

RANA LINEAR R 3KLM NW LOUV+PRI D

Item No: 0052353

SYLVANIA

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B10	72000
Lifespan L90 B50	72000
Lifespan L90 B20	50000
Lifespan L90 B10	46000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.15
Recessed Depth (mm)	90

Packaging

Product EAN number	5410288523538
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (inner)	5410288523538
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-25-40