


START Waterproof T 1500 HO IP65 8500lm 840

Item No: 0068084


SYLVANIA

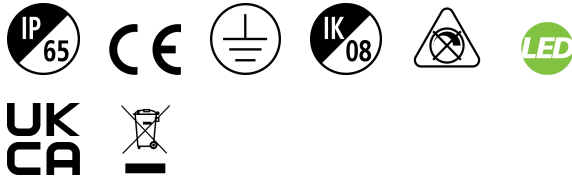

Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 8500 lm, 63 W, 135 lm/W, 4000 K, drive current 350 mA, Non dimmable, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1578 mm x 110 mm x 78 mm ,energy class: A++ A+ A, D-mark

Technical Assets


Dimensions (mm)

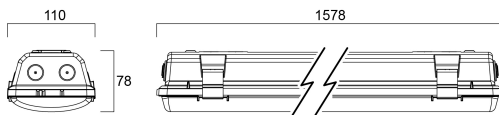

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.15 1.54	0.07 0.09	1100 1090 354
1.0	2.29 3.08	0.14 0.18	270 268 225
1.5	3.44 4.62	0.21 0.27	124 121 100
2.0	4.58 6.16	0.28 0.36	69 68 58
2.5	5.73 7.70	0.35 0.45	44 44 38
3.0	6.88 9.24	0.42 0.54	31 31 25

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 114.0°)
 — C90 - C270 (Half beam angle: 97.8°)

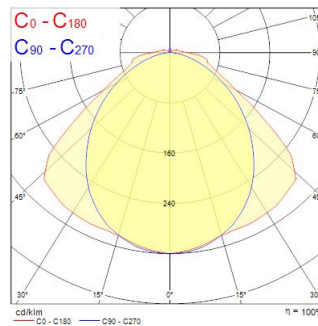

START Waterproof T 1500 HO IP65 8500lm 840

Item No: 0068084

SYLVANIA

General data

Product name	START Waterproof T 1500 HO IP65 8500lm 840
Technology	LED
Housing	PC Polycarbonate
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4357000
Warranty	5 years

Optical data

Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	100
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	67
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	15
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	48
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	48

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	51000

START Waterproof T 1500 HO IP65 8500lm 840

Item No: 0068084



Physical data

IP rating	IP65
IK rating	IK08
Diffuser material	UV stabilized PC Polycarbonate
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.49

Packaging

Product EAN number	5410288680842
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (inner)	05410288680842
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4