


START Flex IP20 827 2600lm

Item No: 0068129

SYLVANIA


PROTM

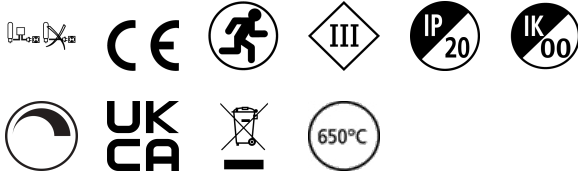

5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs, 24V; 2700K; CRI80; SDCM ≤ 3


Technical Assets

Dimensions (mm)

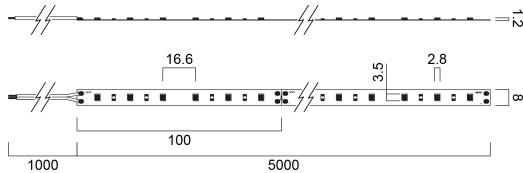

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]
0.5	1.58	112.2°	1.58	5.18	54	590
1.0	3.15	112.2°	3.15	10.36	108	147
1.5	4.73	112.2°	4.73	15.54	162	63
2.0	6.30	112.2°	6.30	20.71	216	39
2.5	7.88	112.2°	7.88	25.89	270	24
3.0	9.45	112.2°	9.45	31.06	324	16



START Flex IP20 827 2600lm

Item No: 0068129

SYLVANIA

General data

Product name	START Flex IP20 827 2600lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4276593
Warranty	5 years

Optical data

Useful luminous flux (Φuse)	2600
Fixture luminous flux (lm)	2600
Luminaire efficacy (lm/W)	108
Correlated colour temperature (k)	2700
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1

Electrical data

Emergency duration (h)	3
Power consumption (W)	24
Total power consumption (W)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	1000
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	8
Nominal Product Height (mm)	1.2
Weight (kg)	0.1

Packaging

Product EAN number	5410288681290
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681297
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40