


# Helios Green WP 1500S PCC 290mA-ND

Item No: 0087026

**SYLVANIA**

## SpecialLITE®

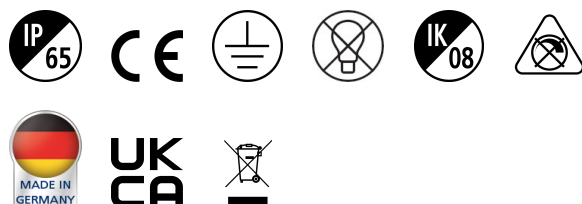

Waterproof type luminaire, polycarbonate housing, double version, 1500mm. Protection type IP65. Luminous flux and light colour vary depending on Helios tubes used. To be used with Helios tubes. Easy to install with stainless steel fixing brackets included for ceiling mounting.

## Technical Assets

### Photometrics

#### General data

Product name	Helios Green WP 1500S PCC 290mA-ND
Technology	Light Source Not Integrated
Cap/Base	G5
Housing	PC Polycarbonate
General application	SPG
Operating temperature range (°C)	0°C...+40°C
Warranty	2 years

#### Optical data

Light colour	N/A
Distribution type	Diffuse
Photobiological Risk Group	Not applicable

#### Electrical data

Light source included	Fixture without Lightsource
Emergency type	
Primary Supply/Product voltage - min (V)	230.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Control gear required	No
Dimmable	No
Drive current (mA)	290
Inrush Current (A)	22.4
Inrush Duration (µs)	176
Nominal Frequency (Hz)	50/60Hz

# Helios Green WP 1500S PCC 290mA-ND

Item No: 0087026



## Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Nominal Product Length (mm)	1560
Nominal Product Width (mm)	69
Nominal Product Height (mm)	78
Weight (kg)	1.11

## Packaging

Product EAN number	5410288870267
Packaging single length / height (cm)	158.0
Packaging single width (cm)	6.9
Packaging single depth (cm)	5.2
DUN14 (inner)	05410288870267
Units per outer package	1
Packaging outer length / height (cm)	158.0
Packaging outer width (cm)	6.9
Packaging outer depth (cm)	5.2