


SylWork Flood Rechargeable

Item No: 0090204

SYLVANIA

YourHome™

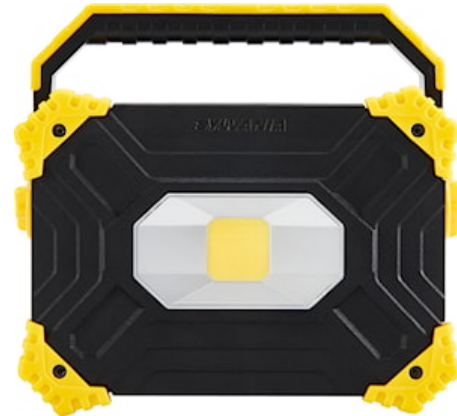

SylWork offers a range of high-performance LED work lights, available in both mains-powered and battery-operated models. Designed for maximum versatility, SylWork provides reliable, temporary lighting for a variety of DIY projects, including home decorating, household repairs, cleaning, tidying, and general maintenance tasks. The SylWork Flood Rechargeable is a battery-operated floodlight, ideal for worksite tasks, maintenance work, camping, and outdoor activities. Designed for convenience, it features a built-in hook for hands-free use and offers up to four hours of operating time with a two-step dimming function for adjustable brightness. Emitting a 4000K cool white light, it provides clear, balanced illumination for any task. Additionally, it doubles as a power bank, allowing you to charge mobile devices. Built for durability and practicality, it fully charges in just four hours and comes with a three-year warranty.

Technical Assets

Photometrics

General data

Product name	SylWork Flood Rechargeable
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Other
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000694
Warranty	3 years

Optical data

Fixture luminous flux (lm)	900
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	None
Photobiological Risk Group	RG1

SylWork Flood Rechargeable

Item No: 0090204

SYLVANIA

Electrical data

Emergency type	
Total power consumption (W)	10
Supply current (A)	2
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	1
Electrical protection	Class III
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	DC
Max. products per 10A C Breaker	1
Max. products per 16A C Breaker	1

Lifetime data

Lifespan L70 B50 | 30000

Physical data

Housing colour	Black
IP rating	IP54
IK rating	IK06
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	178
Nominal Product Width (mm)	129
Nominal Product Height (mm)	44
Weight (kg)	0.56

Packaging

Product EAN number	5410288902043
Packaging single length / height (cm)	13.5
Packaging single width (cm)	5.4
Packaging single depth (cm)	18.5
DUN14 (inner)	15410288902040
Units per outer package	1
Packaging outer length / height (cm)	13.5
Packaging outer width (cm)	5.4
Packaging outer depth (cm)	18.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-35