


# OPTIX RECESSED 625 3L 4000K ALU SSA03

Item No: 2023922


Concord

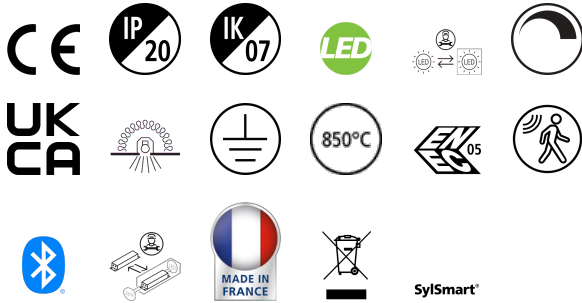

OPTIX RECESSED 625x625 3L 4000K ALU SSA03 is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 625x625 mm. Aluminised plastic extra low glare optics in 3 lines configuration. White RAL9016 fixture body. SylSmart Connected capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 25.5W. Luminaire efficacy 141lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

## Technical Assets


### Dimensions (mm)

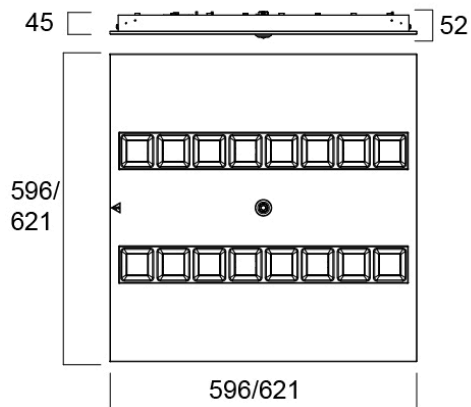

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.77	Ø175	Ø180	9175
1.0	1.54	Ø350	Ø360	2294
1.5	2.31	Ø525	Ø540	1019
2.0	3.08	Ø700	Ø720	572
2.5	3.85	Ø875	Ø900	367
3.0	4.62	Ø1050	Ø1080	250

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 75.2°)



# OPTIX RECESSED 625 3L 4000K ALU SSA03

Item No: 2023922

## Concord

### General data

Product name	OPTIX RECESSED 625 3L 4000K ALU SSA03
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	PIR
Fixture rating	Enclosed
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	141
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG0

### Electrical data

Emergency type	
Total power consumption (W)	25.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	170
Inrush Current (A)	18
Inrush Duration (µs)	175
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# OPTIX RECESSED 625 3L 4000K ALU SSA03

Item No: 2023922

## Concord

### Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	621
Nominal Product Width (mm)	621
Nominal Product Height (mm)	38
Weight (kg)	5.0

### Packaging

Product EAN number	5025768239221
Packaging single length / height (cm)	67.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	64.5
DUN14 (inner)	05025768239221
Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	64.5

### Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25