


BEACON XL MUSE 3K DALI L3 WHT

Item No: 2059323


Concord

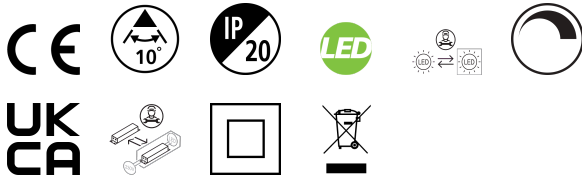

2059323 BEACON XL MUSE 3K DALI L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 41W, total fixture output: 2544lm, luminaire efficacy: 62lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, DALI dimmable, power factor: 0.95, electrical protection: CLASS I, DALI track adaptor, suitable for Concord Lytespan DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

Technical Assets


Dimensions (mm)

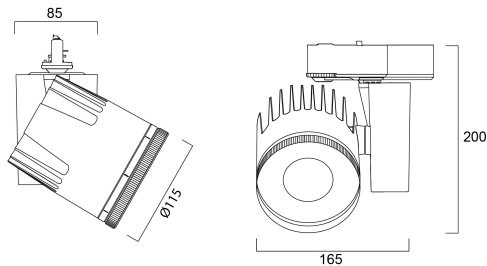

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	0.00	Ø171	0.0°	49123	49123
1.0	0.00	Ø171	0.0°	12281	12281
1.5	0.00	Ø171	0.0°	5458	5458
2.0	0.00	Ø171	0.0°	3070	3070
2.5	0.00	Ø171	0.0°	1985	1985
3.0	0.00	Ø171	0.0°	1366	1366

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 0.0°)

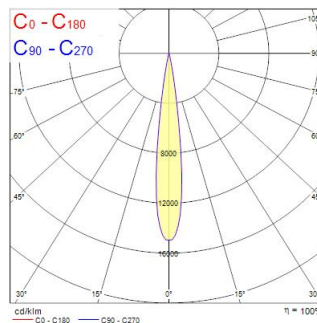

BEACON XL MUSE 3K DALI L3 WHT

Item No: 2059323

Concord

General data

Product name	BEACON XL MUSE 3K DALI L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2544
Luminaire efficacy (lm/W)	62
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	10
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	41
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	5
Drive current (mA)	1050
Inrush Current (A)	30
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A B Breaker	13
Max. products per 16A B Breaker	20

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	86000

Physical data

Housing colour	White
IP rating	IP20
Reflector finish	Not Applicable
Nominal Product Width (mm)	165
Nominal Product Height (mm)	200
Nominal Product Diameter (mm)	115
Weight (kg)	1.7

BEACON XL MUSE 3K DALI L3 WHT

Item No: 2059323

Concord

Packaging

Product EAN number	5025768593231
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768593231
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0