



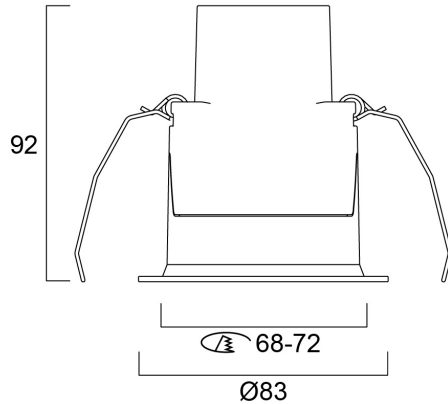

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.71	50°	2746
1.0	1.42	50°	686
1.5	2.13	50°	308
2.0	2.84	50°	171
2.5	3.55	50°	110
3.0	4.26	50°	78

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 70.5°)

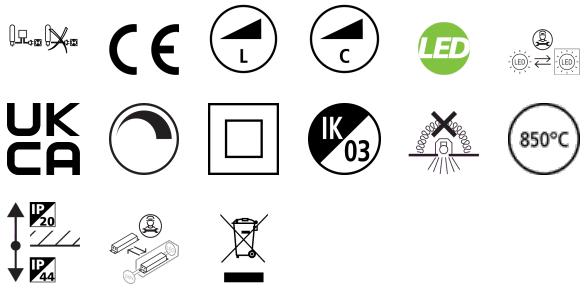