


OFFICELYTE 600 4000K C90 HE DALI EMPRO

Item No: 2069531


Concord

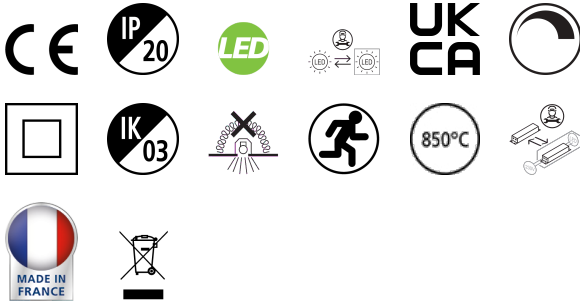

Concord OFFICELYTE 600 4000K C90 HE DALI EMPRO is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 3150lm luminous flux, 26.5W total power consumption, 119lm/W efficacy level, CRi90 4000K (Neutral white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class I electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. Integrated emergency with 3-hours LiFePO4 battery. DALI dimmable.


Technical Assets

Dimensions (mm)

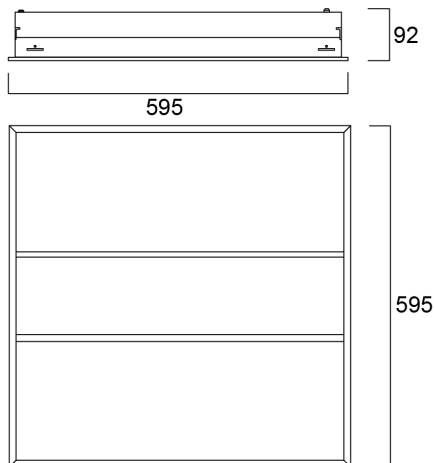

Photometrics

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [ft] | Beam diameter [in] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|--------------------|------------------------------|
| 0.5 | 0.72 0.95 | 0.72 0.95 | 2.36 3.12 | 9.33 12.32 | 8000 1522 43.9° 124 |
| 1.0 | 1.43 1.90 | 1.43 1.90 | 4.69 6.23 | 18.66 24.53 | 1700 488 38.9° 105 |
| 1.5 | 2.15 2.85 | 2.15 2.85 | 7.06 9.37 | 27.77 36.63 | 786 264 35.9° 145 |
| 2.0 | 2.86 3.80 | 2.86 3.80 | 9.41 12.47 | 37.11 49.13 | 425 114 35.9° 81 |
| 2.5 | 3.58 4.74 | 3.58 4.74 | 11.76 15.41 | 46.04 60.13 | 272 73 35.9° 62 |
| 3.0 | 4.30 5.69 | 4.30 5.69 | 14.11 18.71 | 55.07 72.53 | 199 51 35.9° 46 |



OFFICELYTE 600 4000K C90 HE DALI EMPRO

Item No: 2069531

Concord

General data

| | |
|---|--|
| Product name | OFFICELYTE 600 4000K C90 HE DALI EMPRO |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| Built in presence detector | NONE |
| General application | Office, Education |
| Operating temperature range (°C) | 5°C...+35°C |
| Performance ambient temperature Tq (°C) | 25 |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|---------------|
| Fixture luminous flux (lm) | 3150 |
| Luminaire efficacy (lm/W) | 119 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 87 |
| Distribution type | Symmetric |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Luminous flux (emergency) (lm) | 345 |

Electrical data

| | |
|--|-----------------------------|
| Emergency mode | Maintained |
| Emergency type | |
| Emergency duration (h) | 3 |
| Total power consumption (W) | 26.5 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Lamp power factor | 0.97 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 10 |
| Electrical protection | Class II |
| Control gear required | No |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | DALI-2 |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 650 |
| Inrush Current (A) | 13.6 |
| Inrush Duration (µs) | 304 |
| Energy Efficiency Class (A->G) of contained light source | C |
| Nominal Frequency (Hz) | 50/60Hz |
| LED Flickering Rate | Ultra low (5% or less) |
| Max. products per 10A C Breaker | 30 |
| Max. products per 13A C Breaker | 38 |
| Max. products per 16A C Breaker | 46 |
| Max. products per 20A C Breaker | 58 |
| Max. products per 10A B Breaker | 18 |
| Max. products per 13A B Breaker | 23 |
| Max. products per 16A B Breaker | 28 |
| Max. products per 20A B Breaker | 35 |
| Connectable conductor cross section - Min (mm ²) | 0.75 |
| Connectable conductor cross section - Max (mm ²) | 2.5 |

OFFICELYTE 600 4000K C90 HE DALI EMPRO

Item No: 2069531

Concord

Lifetime data

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B50 | 93000 |

Physical data

| | |
|-----------------------------|----------------------------------|
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK03 |
| Diffuser finish | Prismatic |
| Diffuser material | PMMA Acrylic |
| Reflector finish | Not Applicable |
| Nominal Product Length (mm) | 595 |
| Nominal Product Width (mm) | 595 |
| Nominal Product Height (mm) | 90 |
| Weight (kg) | 5.7 |

Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 5025768695317 |
| Packaging single length / height (cm) | 67.0 |
| Packaging single width (cm) | 10.0 |
| Packaging single depth (cm) | 61.5 |
| DUN14 (inner) | 05025768695317 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 67.0 |
| Packaging outer width (cm) | 10.0 |
| Packaging outer depth (cm) | 61.0 |

Safety data

| | |
|----------------------------------|------|
| Glow Wire Test (°C) | 850 |
| Optimal operating condition (°C) | 5-35 |