

OFFICELYTE 600 4000K C90 HO SSA03

Item No: 2069538


Concord



Concord OFFICELYTE 600 4000K C90 HO SSA03 is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 4200lm luminous flux, 34.5W total power consumption, 122lm/W efficacy level, CRI90 4000K (Neutral white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class II electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 650°C. SylSmart Connected enabled with integrated sensor.

Technical Assets


Dimensions (mm)

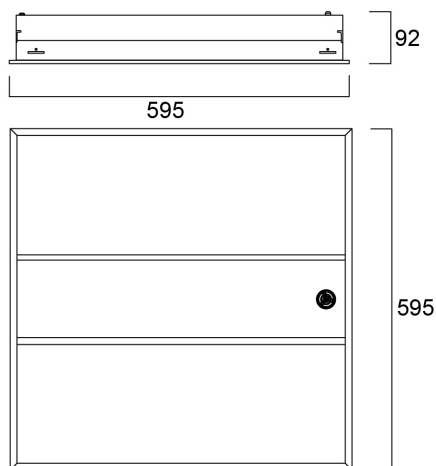

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]
0.5	0.72	87.0°	0.95	3.12	12.3	907
1.0	1.43	87.0°	1.90	6.23	24.8	228
1.5	2.15	87.0°	2.85	9.36	37.2	152
2.0	2.86	87.0°	3.80	12.47	49.1	91
2.5	3.58	87.0°	4.74	15.55	61.0	57
3.0	4.30	87.0°	5.69	18.64	72.9	46

Distance [m] Cone diameter [m]
C0 - C180 (half beam angle: 87.0°)
C90 - C270 (half beam angle: 71.2°)



OFFICELYTE 600 4000K C90 HO SSA03

Item No: 2069538

Concord

General data

Product name	OFFICELYTE 600 4000K C90 HO SSA03
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	PIR
General application	Office, Education
Operating temperature range (°C)	5°C...+35°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	122
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	87
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	34.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	900
Inrush Current (A)	15
Inrush Duration (µs)	220
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	33
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	12
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OFFICELYTE 600 4000K C90 HO SSA03

Item No: 2069538

Concord

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	93000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Reflector finish	Not Applicable
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	90
Weight (kg)	4.5

Packaging

Product EAN number	5025768695386
Packaging single length / height (cm)	67.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	61.5
DUN14 (inner)	05025768695386
Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	61.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-35