


INSAVER 150 HE TOPPER LED WW PIR PLUS3

Item No: 3033924

SYLVANIA


PROTM

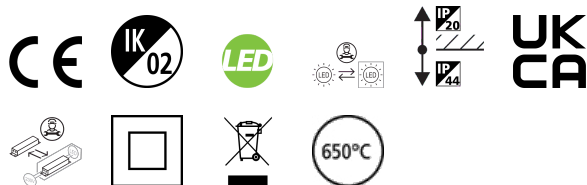

Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm. Wieland GST compatible.

Technical Assets


Dimensions (mm)

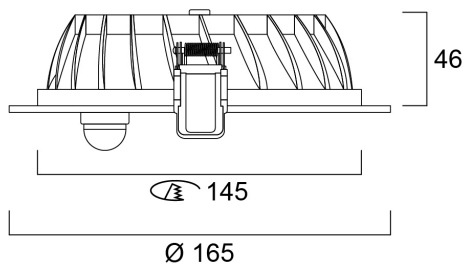

Photometrics

Distance [m]	Cone diameter [m]	E171 E271	180° 35.4°	180° 55°
0.5	0.71	199	180°	55°
1.0	1.42	49	180°	102°
1.5	2.13	21	180°	148°
2.0	2.84	12	180°	194°
2.5	3.55	7	180°	240°
3.0	4.26	4	180°	286°

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 70.8°) Illuminance [lx]

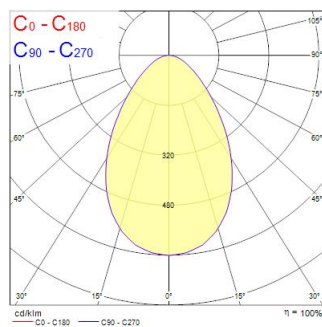

INSAVER 150 HE TOPPER LED WW PIR PLUS3

Item No: 3033924

SYLVANIA

General data

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	64

Electrical data

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E

Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Weight (kg)	0.7

Packaging

Product EAN number	8711971339243
Packaging single length / height (cm)	25.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (inner)	18711971339240
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	31.0

Safety data

Glow Wire Test (°C)	650
---------------------	-----