


# TARG/ROUND MEDIUM 4650LM COB LED 3K AL

Item No: 4070589


**Concord**

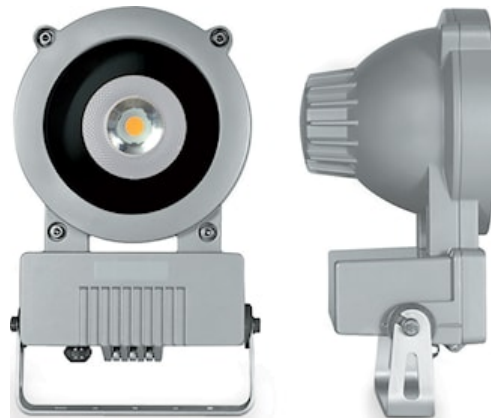

LED Exterior floodlight, Corrosion resistant die-cast aluminium body. Aluminium mounting bracket., 4650lm, 43W, 108lm/W, 3000K, CRI80+, non dimmable, IP66, IK08, (HxWxD) 200x163x345mm, 3 step Mac Adam Ellipse, 4kg, aluminium grey, Classe I, 220-240V, energy class : A++, A+, A

## Technical Assets


### Dimensions (mm)

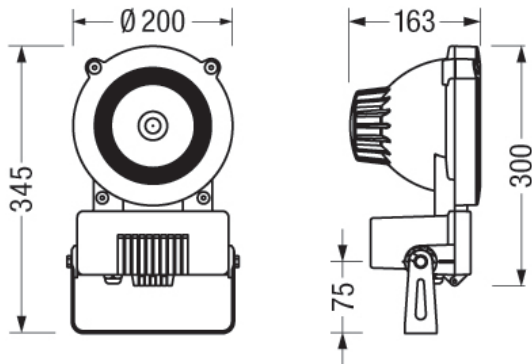

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.29	0.29	16.1°	4068 16163
1.0	0.58	0.58	16.1°	1027 4042
1.5	0.87	0.87	16.1°	454 2019
2.0	1.15	1.15	16.1°	287 1139
2.5	1.44	1.44	16.1°	185 727
3.0	1.73	1.73	16.1°	136 508

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 32.2°)

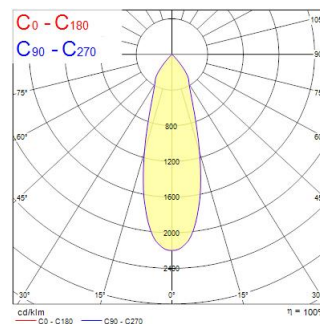

# TARG/ROUND MEDIUM 4650LM COB LED 3K AL

Item No: 4070589

## Concord

### General data

Product name	TARG/ROUND MEDIUM 4650LM COB LED 3K AL
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted, Ground mounted
Environment	External
General application	Office, Hospitality, Retail, Logistics & Industry, Education, Museums & Galleries
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	108
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	32
Photobiological Risk Group	RG1

### Electrical data

Electrical protection	Class I
Dimmable	No
Nominal Frequency (Hz)	50Hz

### Lifetime data

Lifespan L80 B10	50000
------------------	-------

### Physical data

Housing colour	RAL 9007 - Aluminium grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	163
Nominal Product Width (mm)	200
Nominal Product Height (mm)	345
Weight (kg)	4.0

### Packaging

Product EAN number	5026524705899
Packaging single length / height (cm)	33.0
Packaging single width (cm)	24.0
Packaging single depth (cm)	20.0
DUN14 (inner)	05026524705899
Units per outer package	1
Packaging outer length / height (cm)	33.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	20.0