


# F18w/T8/865 Ee N Me

Item No: 0001477

**SYLVANIA**

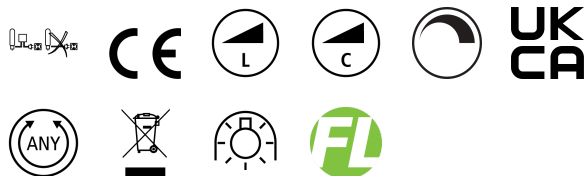

T8 Luxline Plus

## Technical Assets

### Photometrics

#### General data

|                     |   |
|---------------------|---|
| Product name        | F18w/T8/865 Ee N Me   |
| Technology          | Fluorescent   |
| Lamp shape          | Tube, double-ended  |
| Cap/Base            | G13   |
| Lamp finish         | Frosted/Coated  |
| Fixture rating      | Open  |
| General application | Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail |
| ETIM Class          | EC000108  |

#### Optical data

|  |                |
|--|----------------|
| Useful luminous flux ( $\Phi_{use}$ )                                | 1300           |
| Luminous flux (Rated) (lm)   | 1300           |
| Ambient temperature for maximum luminous flux ( $^{\circ}\text{C}$ ) | 25             |
| Correlated colour temperature (k)                                    | 6500           |
| Light colour   | Daylight       |
| Colour Code  | 865            |
| CRI (Ra)   | 85             |
| Colour Variation Initial (SDCM)                                      | SDCM5          |
| Adjustable chromaticity  | N              |
| Photobiological Risk Group   | Not applicable |
| Rated lumen maint. factor (%) at 2000 h 50Hz                         | 0.96           |
| Rated lumen maint. factor (%) at 4000 h 50Hz                         | 0.94           |
| Rated lumen maint. factor (%) at 6000 h 50Hz                         | 0.92           |
| Rated lumen maint. factor (%) at 8000 h 50Hz                         | 0.91           |
| Rated lumen maint. factor (%) at 12000 h 50Hz                        | 0.90           |

# F18w/T8/865 Ee N Me

Item No: 0001477

**SYLVANIA**

|   |                                |
|---|--------------------------------|
| Rated lumen maint. factor (%) at 16000 h 50Hz | 0.89                           |
| Rated lumen maint. factor (%) at 20000 h 50Hz | 0.87                           |
| <b>Electrical data</b>                        |                                |
| Power consumption (W)                         | 18                             |
| Wattage (W)                                   | 18.00                          |
| Supply current (A)                            | 0.370                          |
| Primary Supply/Product voltage - min (V)      | 50                             |
| Primary Supply/Product voltage - max (V)      | 64                             |
| Control gear required                         | Yes                            |
| Dimmable                                      | Yes                            |
| Dimming method                                | Mains: leading / trailing edge |
| Drive current (mA)                            | 370                            |
| Lamp Energy Label (class)                     | G                              |
| kWh per 1000 hours burning time               | 23                             |
| Nominal Frequency (Hz)                        | 50Hz                           |

## Lifetime data

|   |       |
|---|-------|
| Average life (Nominal) (h)                | 20000 |
| Average life (Rated) (h)                  | 20000 |
| Rated survival factor (%) at 2000 h 50Hz  | 0.99  |
| Rated survival factor (%) at 4000 h 50Hz  | 0.98  |
| Rated survival factor (%) at 6000 h 50Hz  | 0.96  |
| Rated survival factor (%) at 8000 h 50Hz  | 0.94  |
| Rated survival factor (%) at 12000 h 50Hz | 0.92  |
| Rated survival factor (%) at 16000 h 50Hz | 0.80  |
| Rated survival factor (%) at 20000 h 50Hz | 0.50  |

## Physical data

|                                     |             |
|-------------------------------------|-------------|
| Nominal Product Length (mm)         | 600.0       |
| Nominal Product Diameter (mm)       | 26          |
| Max. Length base to base (mm) - A   | 589.8       |
| Length base to pin Min-Max (mm) - B | 594.5-596.9 |
| Max. Lamp Length (mm) - C/L         | 604.0       |
| Max. Lamp Diameter (mm) - D         | 28.0        |
| Weight (kg)                         | 0.086       |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288014777  |
| Packaging single length / height (cm) | 61.0           |
| Packaging single width (cm)           | 2.9            |
| Packaging single depth (cm)           | 2.8            |
| DUN14 (inner)                         | 15410288014774 |
| Units per outer package               | 25             |
| Packaging outer length / height (cm)  | 63.0           |
| Packaging outer width (cm)            | 15.5           |
| Packaging outer depth (cm)            | 15.0           |

## Safety data

|  |            |
|--|------------|
| Lamp mercury content (mg)                  | 2.80       |
| Breakage cleaning instructions             | Applicable |
| Recommendation for disposal at end of life | Applicable |
| Special purpose lamp                       | No         |
| Suitable for household illumination        | Yes        |