




Full spectrum lighting including UVA radiation. High colour rendering (Ra98), daylight color temperature 6500K. For application where natural light is required, support treatment of Seasonal Affective Disorder (SAD).

Technical Assets

Dimensions (mm)

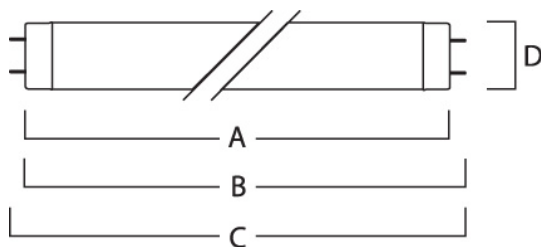

Photometrics

General data

Product name	ACTIVA
Technology	Fluorescent
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	SPG
ETIM Class	EC000108

Optical data

Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	6500
Light colour	Activa
CRI (Ra)	98

Electrical data

Power consumption (W)	18
Wattage (W)	18.00
Supply current (A)	0.370
Primary Supply/Product voltage - min (V)	50.0
Primary Supply/Product voltage - max (V)	64.0
Control gear required	Yes
Dimmable	Yes
Drive current (mA)	370
Nominal Frequency (Hz)	50Hz

Lifetime data

Average life (Nominal) (h)	14000
Average life (Rated) (h)	14000

Physical data

Nominal Product Length (mm)	600.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	589.8
Length base to pin Min-Max (mm) - B	594.5-596.9
Max. Lamp Length (mm) - C/L	604.0
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.082

Packaging

Product EAN number	5410288022338
Packaging single length / height (cm)	67.1
Packaging single width (cm)	2.7
Packaging single depth (cm)	2.7
DUN14 (inner)	15410288022335
Units per outer package	10
Packaging outer length / height (cm)	70.1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	14.7

Safety data

Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Suitable for household illumination	No