


# Pixo Large Food Meat NB MB WB White

Item No: 0004590

**SYLVANIA**


**PRO**<sup>TM</sup>

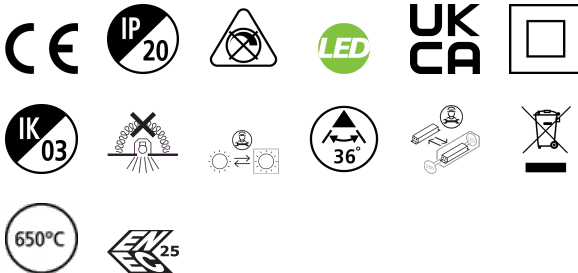

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for MEAT applications improves the presentation of butcher's counter, the special light spectrum makes the appearance of meats and cured meats more succulent and appetizing Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 3000K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 2850lm, efficacy: 71lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm, length of the Adaptor : 158mm. 5 years warranty Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

## Technical Assets

### Dimensions (mm)

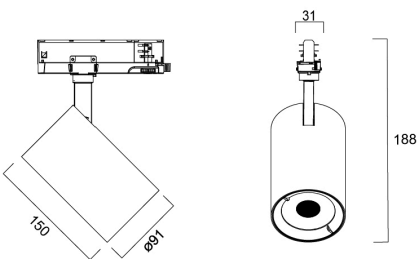

### Photometrics


Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.30	0.33	0.33	2000
				1447
1.0	0.61	0.67	0.67	650
				282
1.5	0.91	1.00	1.00	289
				123
2.0	1.22	1.33	1.33	160
				69
2.5	1.52	1.66	1.66	100
				40
3.0	1.82	2.00	2.00	70
				28

Distance [m]      Cone diameter [m]      Beam diameter [m]      Beam diameter [m]      Illuminance [lx]  
 — C2 - C180 (Half beam angle: 36.8°)  
 — C90 - C270 (Half beam angle: 33.8°)

# Pixo Large Food Meat NB MB WB White

Item No: 0004590

**SYLVANIA**

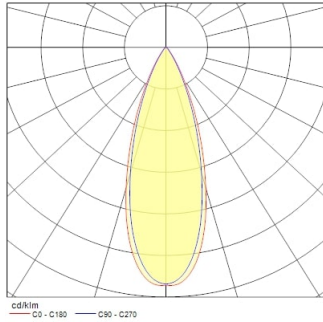

## General data

Product name	Pixo Large Food Meat NB MB WB White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4289263
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	71
Correlated colour temperature (k)	3000
Light colour	N/A
CRI (Ra)	70
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Electrical data

Emergency type	
Total power consumption (W)	40
Supply current (A)	0.17
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Inrush Current (A)	48
Inrush Duration (µs)	4
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	32
Max. products per 20A C Breaker	40
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25

# Pixo Large Food Meat NB MB WB White

Item No: 0004590

**SYLVANIA**

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	85000
Lifespan L90 B50	41000

## Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	High-gloss
Nominal Product Length (mm)	150
Nominal Product Diameter (mm)	91
Weight (kg)	0.74

## Packaging

Product EAN number	5410288045900
Packaging single length / height (cm)	21.5
Packaging single width (cm)	12.7
Packaging single depth (cm)	22.3
DUN14 (inner)	15410288045907
Units per outer package	8
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	25.0

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25