


Pixo Large Food Bread NB MB WB Black

Item No: 0004597

SYLVANIA


PROTM

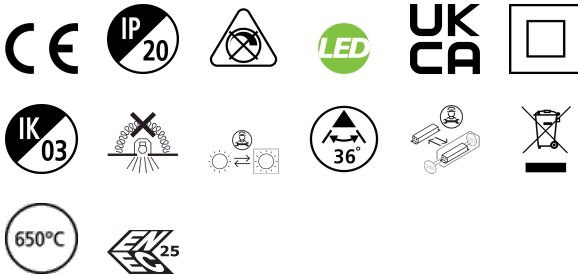

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for BREAD applications, ideal for enhancing the nuances of golden bread, gold shade gives a more "greedy" appearance at the counter Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 2400K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 3400lm, efficacy: 85lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm, lenght of the Adaptor : 158mm. 5 years warranty Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

Technical Assets

Dimensions (mm)

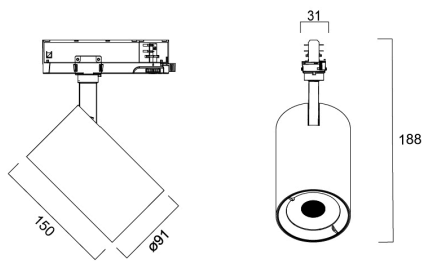

Photometrics


Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.29 0.31	Ø171 Ø180 Ø180	33333 1488 14447
1.0	0.58 0.63	Ø171 Ø180 Ø180	8259 3711 3612
1.5	0.87 0.94	Ø171 Ø180 Ø180	3671 1582 1529
2.0	1.15 1.25	Ø171 Ø180 Ø180	2085 939 903
2.5	1.44 1.57	Ø171 Ø180 Ø180	1321 586 573
3.0	1.73 1.88	Ø171 Ø180 Ø180	939 413 401

— C2 - C180 (Half beam angle: 34.8°)
 — C30 - C270 (Half beam angle: 32.2°)

Pixo Large Food Bread NB MB WB Black

Item No: 0004597

SYLVANIA



General data

Product name	Pixo Large Food Bread NB MB WB Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4289266
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	2400
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	40
Supply current (A)	0.17
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Inrush Current (A)	48
Inrush Duration (µs)	4
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	32
Max. products per 20A C Breaker	40
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25

Pixo Large Food Bread NB MB WB Black

Item No: 0004597

SYLVANIA

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	85000
Lifespan L90 B50	41000

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	High-gloss
Nominal Product Length (mm)	150
Nominal Product Diameter (mm)	91
Weight (kg)	0.74

Packaging

Product EAN number	5410288045979
Packaging single length / height (cm)	21.5
Packaging single width (cm)	12.7
Packaging single depth (cm)	22.3
DUN14 (inner)	15410288045976
Units per outer package	8
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	25.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25