


PROTM

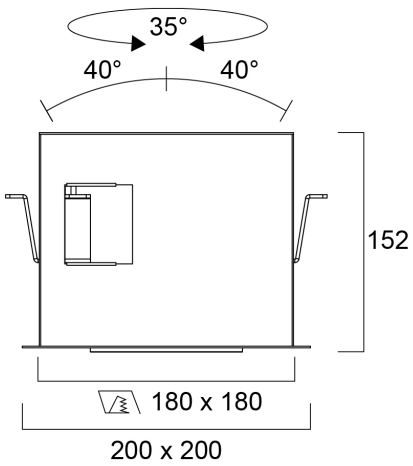

0.5	0.35	81°	182"	1858
		81°	182"	890
1.0	0.70	81°	182"	3911
		81°	182"	1645
1.5	1.04	81°	182"	1738
		81°	182"	735
2.0	1.39	81°	182"	819
		81°	182"	412
2.5	1.74	81°	182"	638
		81°	182"	284
3.0	2.09	81°	182"	435
		81°	182"	185

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 35.4°)

