

# START Track Spot Integral 1500lm 940 MB WB WHT

Item No: 0005428


**SYLVANIA**



Integrated LED spotlight, Textured White - RAL9016, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lens 64° beam angle included, color temperature: 4000k, total system power: 17W, total fixture output: 1500 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 410mA, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø60x117x248, weight: 0.486kg.

## Technical Assets


### Dimensions (mm)

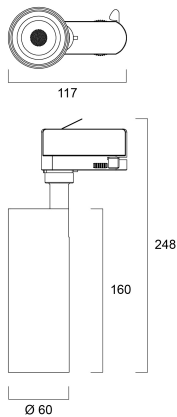

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.33	Ø17"	18.1"	13125
1.0	0.67	Ø34"	36.2"	3281
1.5	1.00	Ø51"	54.3"	1458
2.0	1.33	Ø68"	72.4"	800
2.5	1.66	Ø85"	90.5"	525
3.0	2.00	Ø102"	108.6"	360

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 36.8°)

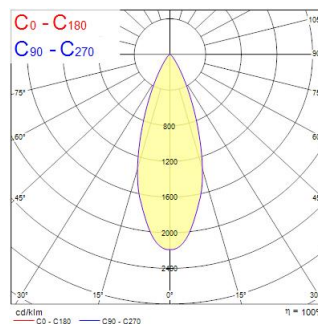

# START Track Spot Integral 1500lm 940 MB WB WHT

Item No: 0005428

**SYLVANIA**

## General data

Product name	START Track Spot Integral 1500lm 940 MB WB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Indoor
General application	Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4276971
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
Correlated colour temperature (k)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	17
Supply current (A)	0.077
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	410
Inrush Current (A)	7.4
Inrush Duration (µs)	300
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	64
Max. products per 13A C Breaker	84
Max. products per 16A C Breaker	103
Max. products per 20A C Breaker	129
Max. products per 10A B Breaker	38
Max. products per 13A B Breaker	50
Max. products per 16A B Breaker	62
Max. products per 20A B Breaker	77

## Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	48100
Lifespan L80 B20	41000
Lifespan L80 B10	37700
Lifespan L90 B50	19500
Lifespan L90 B20	17000
Lifespan L90 B10	15900

# START Track Spot Integral 1500lm 940 MB WB WHT

Item No: 0005428



## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	248
Nominal Product Width (mm)	117
Nominal Product Height (mm)	60
Weight (kg)	0.486

## Packaging

Product EAN number	5410288054285
Packaging single length / height (cm)	8.5
Packaging single width (cm)	8.5
Packaging single depth (cm)	25.5
DUN14 (inner)	15410288054282
Units per outer package	12
Packaging outer length / height (cm)	36.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	27.5

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40