


Resisto 1500 IP66 4350-7600lm 840 ST

Item No: 0010481

SYLVANIA


PROTM

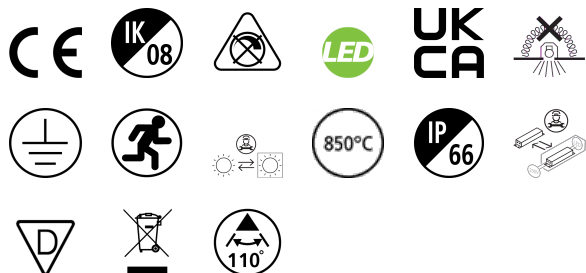

Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform light appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time, IP66, IK08, Class I, SDCM<3, 4000K, CRI>80, non-dimmable, 4350 / 5200 / 6300 / 7600lm (4 different steps selectable with DIP switches), 27 / 31 / 38 / 45W, 161 / 168 / 166 / 169lm/W depends on setting, 100.000hrs L80B10 lifespan, 1500 x 89 x 88mm (L x W x H) dimensions, 2.045kg weight, operating temperature range from 0 to +40°C. D-mark, ENEC certification. Supplied with integrated LiFePO4 3hrs Self Test emergency unit. Providing 800lm in emergency mode.

Technical Assets


Dimensions (mm)



Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]
0.5	1.28 1.32	0.71 0.73	2.33 2.36	9.25 9.33	800 775
1.0	2.57 2.65	1.42 1.46	4.66 4.79	18.7 18.9	400 388
1.5	3.85 3.96	2.13 2.19	7.00 7.11	27.6 28.0	267 259
2.0	5.14 5.31	2.84 2.93	9.33 9.50	36.7 37.4	200 193
2.5	6.42 6.64	3.55 3.66	11.65 11.81	45.8 46.5	160 155
3.0	7.71 7.96	4.26 4.38	14.00 14.21	54.9 55.7	133 128

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 105.0°)
 — C90 - C270 (Half beam angle: 104.2°)



Resisto 1500 IP66 4350-7600lm 840 ST

Item No: 0010481

SYLVANIA

General data

Product name	Resisto 1500 IP66 4350-7600lm 840 ST
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7600
Luminaire efficacy (lm/W)	169
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	800

Electrical data

Emergency type	
Emergency duration (h)	3
Total power consumption (W)	45
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	16.3
Inrush Duration (µs)	234
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	32
Max. products per 13A C Breaker	41
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	64
Max. products per 10A B Breaker	22
Max. products per 13A B Breaker	28
Max. products per 16A B Breaker	35
Max. products per 20A B Breaker	44
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

Resisto 1500 IP66 4350-7600lm 840 ST

Item No: 0010481

SYLVANIA

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B50	77000

Physical data

Housing colour	RAL 7035 - Light grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	89
Nominal Product Height (mm)	88
Weight (kg)	2.045

Packaging

Product EAN number	5410288104812
Packaging single length / height (cm)	151.0
Packaging single width (cm)	10.3
Packaging single depth (cm)	8.8
DUN14 (inner)	15410288104819
Units per outer package	6
Packaging outer length / height (cm)	152.5
Packaging outer width (cm)	28.0
Packaging outer depth (cm)	22.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	0 °C-40