

ToLEDo MicroLynx Frosted 470LM 840 SL

Item No: 0026787




The microlynx LED FROSTED 4W aims to replace a GX53 CFL lamp. This product with a 15,000 hours life is available in 4000 Kelvin color, and will deliver high output of 470lm instantaneously. Perfect for kitchen or bathroom this product is 3 years warranty for a complete peace of mind.

Technical Assets

Dimensions (mm)

GX53

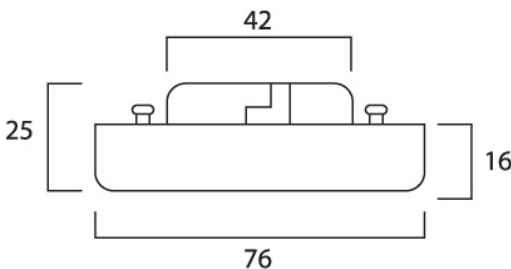

Photometrics

General data

Product name	ToLEDo MicroLynx Frosted 470LM 840 SL
Technology	LED
Watt (Rated) (W)	4.5
Lamp shape	Flat round
Cap/Base	GX53
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number SE	8292211

Optical data

Luminous flux (Rated) (lm)	470
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Adjustable chromaticity	N
Lumen maintenance at end of nominal life (%)	80

ToLEDo MicroLynx Frosted 470LM 840 SL

Item No: 0026787



Electrical data

Power consumption (W)	4.5
Wattage (W)	4.5
Equivalent watt (W)	40
Starting time (max) (s)	0.05
Warm-up time to 60% of full light (max) (s)	< 1s => 60%
Supply current (A)	0.052
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.4
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	35

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Height (mm)	25
Nominal Product Diameter (mm)	75
Weight (kg)	0.045

Packaging

Product EAN number	5410288267876
Packaging single length / height (cm)	7.8
Packaging single width (cm)	3.8
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288267873
Units per inner package	6
Packaging inner length / height (cm)	16.3
Packaging inner width (cm)	12.4
Packaging inner depth (cm)	10.5
DUN14 (outer)	25410288267870
Units per outer package	60
Packaging outer length / height (cm)	66.0
Packaging outer width (cm)	18.2
Packaging outer depth (cm)	25.0

Safety data

Optimal operating condition (°C)	0-0
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes