

ToLEDo GLS 1521lm 827 E27 SL4

Item No: 0028204

SYLVANIA




- Compact and elegant design • Suitable replacement for halogen, incandescent and compact fluorescent lamps • Instant light at the flick of a switch • Uniform light distribution • Good colour rendering (CRI 80) • Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas • Lower maintenance costs • A+ energy rating • 12,000 hours average rated life

Technical Assets

Dimensions (mm)

E27

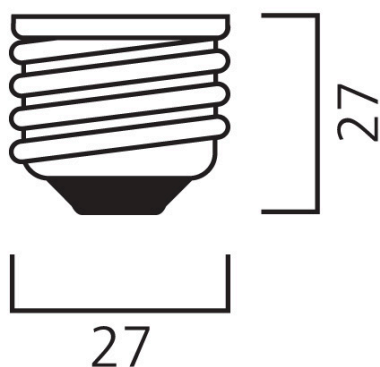

Photometrics

ToLEDo GLS 1521lm 827 E27 SL4

Item No: 0028204

SYLVANIA

General data

Product name	ToLEDo GLS 1521lm 827 E27 SL4
Technology	LED
Watt (Rated) (W)	15
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
Warranty	2 years

Optical data

Useful luminous flux (Φuse)	1521
Luminous flux (Rated) (lm)	1521
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Beam Angle (°)	150
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	15
Wattage (W)	15
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Lamp power factor	0.5
No. Of switching cycles before premature failures	>50000
Inrush Current (A)	3.84
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	78
Max. products per 16A C Breaker	126
Max. products per 20A C Breaker	158

Lifetime data

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000

Physical data

Nominal Product Length (mm)	120
Nominal Product Diameter (mm)	65
Weight (kg)	0.31

Packaging

Product EAN number	5410288282046
Packaging single length / height (cm)	28.5
Packaging single width (cm)	7.0
Packaging single depth (cm)	13.5
DUN14 (inner)	15410288282043
Units per outer package	15
Packaging outer length / height (cm)	36.5
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	43.0

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures