

ToLEDo Superia T5 ECG HE V3 4FT 2400LM 840

Item No: 0029263




50,000 hours average rated lifetime Last 2.5 times longer than 28W 1149mm fluorescent tri-phosphor T5 lamp High switching cycles – 200,000X High lumen efficacy Omni-directional light distribution and wide beam angle Minimum and maximum operating temperature: -20°C to 50°C Glass construction and polycarbonate end-caps Not suitable for direct mains (AC 220-240V) or magnetic/ CCG ballast Works only with compatible electronic ballasts Ideal for factories, parking lots, supermarkets, department stores, schools and offices

Technical Assets

Dimensions (mm)

Photometrics

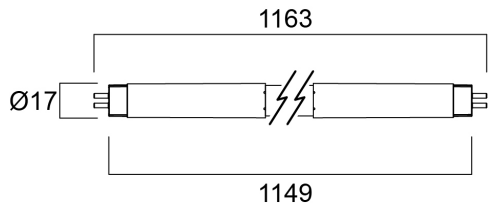

ToLEDo Superia T5 ECG HE V3 4FT 2400LM 840

Item No: 0029263

SYLVANIA

General data

Product name	ToLEDo Superia T5 ECG HE V3 4FT 2400LM 840
Technology	LED
Watt (Rated) (W)	17
Lamp shape	Tube, double-ended
Cap/Base	G5
Lamp finish	Opal
Built in presence detector	NONE
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	2400
Luminous flux (Rated) (lm)	2400
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	17
Wattage (W)	17
Supply current (A)	215
Primary Supply/Product voltage - min (V)	130.0
Primary Supply/Product voltage - max (V)	130.0
Ignition voltage (V)	100
Control gear required	Yes
Control gear type	Electronic ballast
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	17.7
Inrush Duration (μ s)	51
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	54
Max. products per 20A C Breaker	67
Max. products per 10A B Breaker	56
Max. products per 13A B Breaker	73
Max. products per 16A B Breaker	90

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

Housing colour	White
IP rating	IP20
Nominal Product Length (mm)	1162
Nominal Product Diameter (mm)	17
Weight (kg)	0.14

ToLEDo Superia T5 ECG HE V3 4FT 2400LM 840

Item No: 0029263



Packaging

Product EAN number	5410288292632
Packaging single length / height (cm)	116.0
Packaging single width (cm)	2.0
Packaging single depth (cm)	2.0
DUN14 (inner)	15410288292639
Units per outer package	10
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	8.0

Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	None