

# ToLEDo Retro G9 CL 250LM 840 SL

Item No: 0029666


**SYLVANIA**



LED retrofit replacement for halogen G9 mains voltage capsules ToLEDo Retro G9 has the same look and feel as halogen design thanks to glass construction body and wide light distribution Compact design Omni-directional light distribution 250lm = 25W halogen G9 lamp 90% energy saving Non-dimmable Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications

## Technical Assets

### Dimensions (mm)

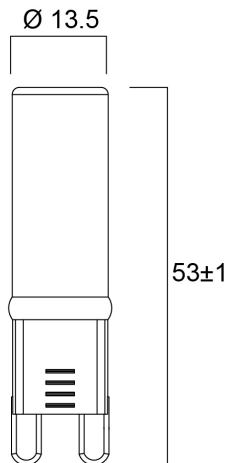

### Photometrics

# ToLEDo Retro G9 CL 250LM 840 SL

Item No: 0029666

**SYLVANIA**

## General data

Product name	ToLEDo Retro G9 CL 250LM 840 SL
Technology	LED
Watt (Rated) (W)	2.2
Cap/Base	G9
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741139
Warranty	3 years

## Optical data

Useful luminous flux ( $\Phi_{use}$ )	250
Luminous flux (Rated) (lm)	250
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

## Electrical data

Power consumption (W)	2.2
Wattage (W)	2.2
Equivalent watt (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	1.2
Inrush Duration ( $\mu$ s)	520
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	133
Max. products per 16A B Breaker	66

## Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

## Physical data

Nominal Product Length (mm)	52.5
Nominal Product Diameter (mm)	15
Weight (kg)	0.008

# ToLEDo Retro G9 CL 250LM 840 SL

Item No: 0029666

**SYLVANIA**

## Packaging

Product EAN number	5410288296661
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288296668
Units per outer package	6
Packaging outer length / height (cm)	19.1
Packaging outer width (cm)	11.3
Packaging outer depth (cm)	9.2

## Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures