

START Downlight 220 2150lm 840 Surface

Item No: 0030447

SYLVANIA


STARTTM



Surface mounted LED downlight with diameter size of 220mm. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 4000K, Driver Current: 600mA, CRI80, Non-dimmable LED driver, IP20, IK07, (HxW) 94x220mm, Class 2, 220-240V. Meets TP(a) requirements.


Technical Assets

Dimensions (mm)

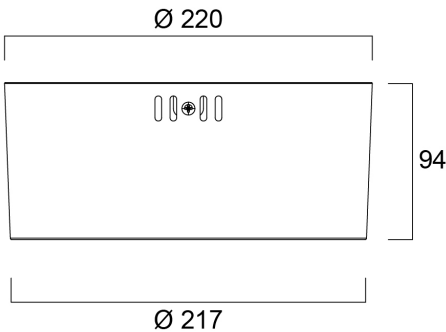

Photometrics

0.5	0.82	50° S/C0	39.5°	4479 1000
1.0	1.65	50° S/C0	39.5°	1120 280
1.5	2.47	50° S/C0	39.5°	496 114
2.0	3.30	50° S/C0	39.5°	280 64
2.5	4.12	50° S/C0	39.5°	179 41
3.0	4.95	50° S/C0	39.5°	124 29
Distance [m]		Cone diameter [m]		Illuminance [lx]
— CO - C180 (half beam angle: 79.0°)				



START Downlight 220 2150lm 840 Surface

Item No: 0030447

SYLVANIA

General data

Product name	START Downlight 220 2150lm 840 Surface
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
Built in presence detector	NONE
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	
ETIM Class	EC001744
E-number FI	4279539
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2150
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	17.2
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	47
Max. products per 16A C Breaker	57
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	30
Max. products per 13A B Breaker	38
Max. products per 16A B Breaker	45
Max. products per 20A B Breaker	53
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	1.5

START Downlight 220 2150lm 840 Surface

Item No: 0030447



Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	95
Nominal Product Diameter (mm)	220
Weight (kg)	0.802

Packaging

Product EAN number	5410288304472
Packaging single length / height (cm)	22.0
Packaging single width (cm)	22.0
Packaging single depth (cm)	10.3
DUN14 (inner)	15410288304479
Units per outer package	8
Packaging outer length / height (cm)	45.5
Packaging outer width (cm)	23.5
Packaging outer depth (cm)	43.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-25