

# Granit IP65 DALI 19000lm 865 WB

Item No: 0039624


**SYLVANIA**



Integrated LED highbay; Black aluminium housing; 19100 Lm; 139 W; 137 Lm/W; 6500K; Drive current: 2400mA; CRI 80; 85° beam angle; DALI dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 321 x 189 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.

## Technical Assets


### Dimensions (mm)

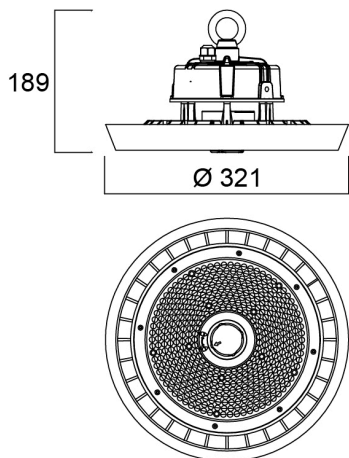

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.86	Ø171	Ø57"	53736 11729
1.0	1.72	Ø342	Ø114"	13434 2902
1.5	2.58	Ø513	Ø171"	5971 1303
2.0	3.44	Ø684	Ø228"	3395 733
2.5	4.30	Ø855	Ø285"	2149 469
3.0	5.16	Ø1026	Ø342"	1480 326

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 81.4°)

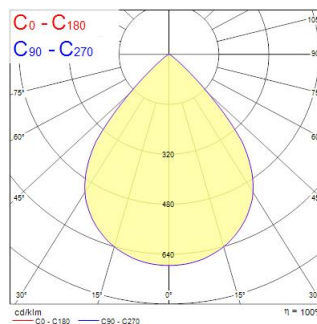

# Granit IP65 DALI 19000lm 865 WB

Item No: 0039624

**SYLVANIA**

## General data

Product name	Granit IP65 DALI 19000lm 865 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4357021
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	19100
Luminaire efficacy (lm/W)	137
Correlated colour temperature (k)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	139
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	2400
Inrush Current (A)	138
Inrush Duration (µs)	118
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	7
Max. products per 16A C Breaker	9
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	5
Max. products per 20A B Breaker	7

## Lifetime data

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

# Granit IP65 DALI 19000lm 865 WB

Item No: 0039624

**SYLVANIA**

## Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	321
Nominal Product Width (mm)	321
Nominal Product Height (mm)	189
Nominal Product Diameter (mm)	321
Weight (kg)	3.58

## Packaging

Product EAN number	5410288396248
Packaging single length / height (cm)	38.0
Packaging single width (cm)	38.0
Packaging single depth (cm)	18.5
DUN14 (inner)	05410288396248
Units per outer package	1
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	18.5

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-30-50