




PRO

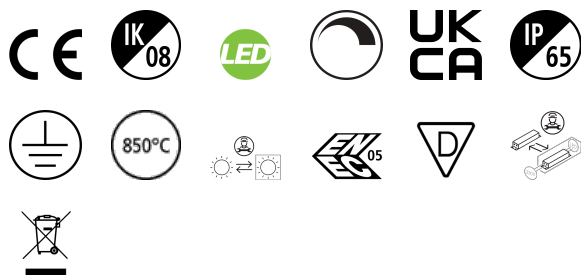

168



Ø 298



0.5	0.89	80°	3428
1.0	1.79	80°	854
1.5	2.68	80°	368
2.0	3.58	80°	164
2.5	4.47	80°	103
3.0	5.36	80°	62

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 93.6°)

