



OTAO LINEAR ST EM MODULE BK

Item No: 0040827

SYLVANIA


PROTM

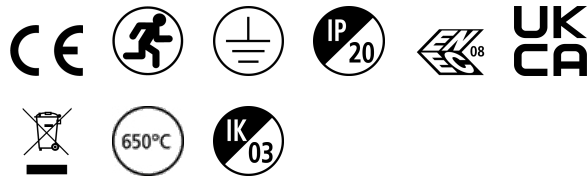


Self-Test on/off emergency module for Otao luminaires, incl LiFePO4 battery, EM indicator and 2pcs of aluminium extrusion for mechanical connection with Otao luminaires; no Self-Test button. RAL9011 (black) finishing.

Technical Assets

Dimensions (mm)

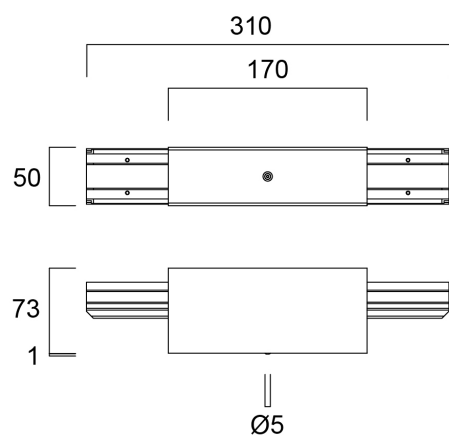

Photometrics

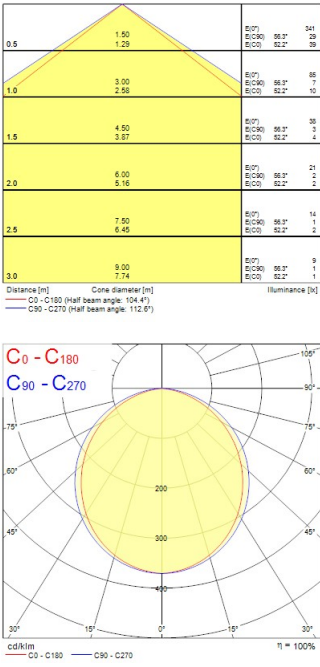

OTAO LINEAR ST EM MODULE BK

Item No: 0040827

SYLVANIA

General data

Product name	OTAO LINEAR ST EM MODULE BK
Technology	Emergency Pack
Type of accessory	Other
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC000471
E-number FI	4170667
Warranty	5 years

Optical data

Fixture luminous flux (lm)	300
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

Electrical data

Emergency type	
Emergency duration (h)	3
Electrical protection	Class I
Max. products per 10A C Breaker	100
Max. products per 16A C Breaker	100
Max. products per 16A B Breaker	100

Physical data

Housing colour	RAL 9011 - Graphite black
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Nominal Product Length (mm)	170
Nominal Product Width (mm)	50
Nominal Product Height (mm)	73
Weight (kg)	0.45

Packaging

Product EAN number	5410288408279
Packaging single length / height (cm)	32.0
Packaging single width (cm)	6.1
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288408276
Units per outer package	5
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	37.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50