


START Panel UGR19 600x600 4800Lm 830 SSC


Item No: 0042566

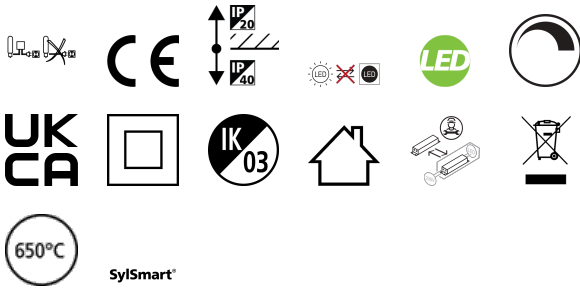

START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4600Lm; 43W; 107Lm/W; Drive current: 950mA; Average lifespan: 100.000Hrs; 3000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Not compatible with surface mounting frames. SylSmart Standalone (SSC) enabled.


Technical Assets

Dimensions (mm)

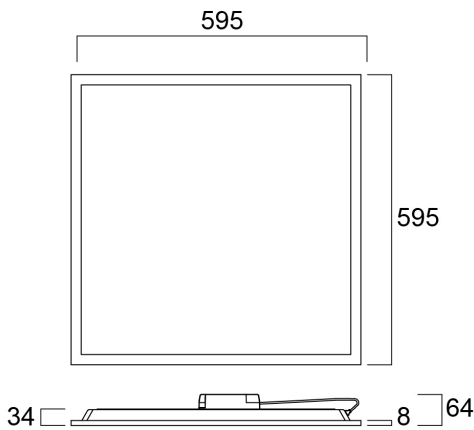

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.01	1.01	45.3°	8731
			45.3°	1824
			45.3°	1565
1.0	2.02	2.02	45.3°	2196
			45.3°	304
			45.3°	268
1.5	3.03	3.03	45.3°	978
			45.3°	170
			45.3°	172
2.0	4.04	4.03	45.3°	549
			45.3°	98
			45.3°	97
2.5	5.05	5.04	45.3°	351
			45.3°	61
			45.3°	62
3.0	6.06	6.04	45.3°	244
			45.3°	43
			45.3°	43

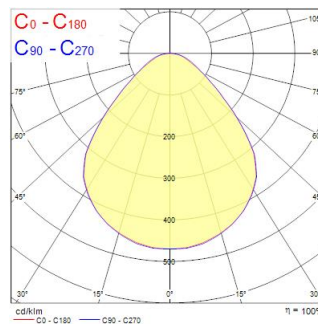

START Panel UGR19 600x600 4800Lm 830 SSC

Item No: 0042566

SYLVANIA

General data

Product name	START Panel UGR19 600x600 4800Lm 830 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278373
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	107
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	43
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	5
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	950
Inrush Current (A)	23
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	23
Max. products per 13A C Breaker	31
Max. products per 16A C Breaker	38
Max. products per 20A C Breaker	48
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	19
Max. products per 16A B Breaker	23
Max. products per 20A B Breaker	29

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START Panel UGR19 600x600 4800Lm 830 SSC

Item No: 0042566



Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	34
Weight (kg)	1.8

Packaging

Product EAN number	5410288425665
Packaging single length / height (cm)	60.0
Packaging single width (cm)	68.5
Packaging single depth (cm)	3.8
DUN14 (inner)	15410288425662
Units per inner package	2
Packaging inner length / height (cm)	65.0
Packaging inner width (cm)	72.0
Packaging inner depth (cm)	10.6
DUN14 (outer)	25410288425669
Units per outer package	40
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	72.0
Packaging outer depth (cm)	101.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45