

# RTS 1500MM 50W 5-WIRE DOUBLE ASYM WHITE

Item No: 0042583

**SYLVANIA**


**PRO**<sup>TM</sup>



RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with double asymmetrical optics provide homogenous light distribution for wide, shelf areas. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 50 W power consumption, 8000 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.

## Technical Assets

### Dimensions (mm)

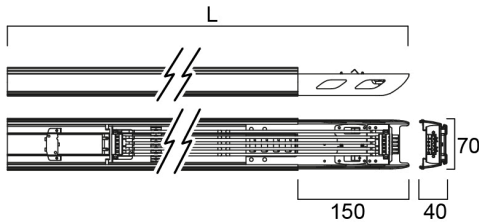


L	600	900	1202	1500	2403	3000	3605	4500
---	-----	-----	------	------	------	------	------	------

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.51 0.71	0.71	2.33	11487 961 4025
1.0	3.01 1.42	1.42	4.66	2872 368 1009
1.5	4.52 2.13	2.13	6.99	1276 309 688
2.0	6.02 2.84	2.84	9.32	716 261 481
2.5	7.53 3.55	3.55	11.65	499 199 381
3.0	9.03 4.26	4.26	13.98	379 171 312

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 70.9°)  
 — C90 - C270 (Half beam angle: 112.9°)



# RTS 1500MM 50W 5-WIRE DOUBLE ASYM WHITE

Item No: 0042583

**SYLVANIA**

## General data

Product name	RTS 1500MM 50W 5-WIRE DOUBLE ASYM WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+30°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000986
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Double asymmetric
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	620
Inrush Current (A)	20
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	19

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	75000

## Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	70.2
Nominal Product Height (mm)	78.6
Weight (kg)	1.7

# RTS 1500MM 50W 5-WIRE DOUBLE ASYM WHITE

Item No: 0042583



## Packaging

Product EAN number	5410288425832
Packaging single length / height (cm)	150.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	6.5
DUN14 (inner)	15410288425839
Units per outer package	10
Packaging outer length / height (cm)	157.0
Packaging outer width (cm)	44.0
Packaging outer depth (cm)	21.0

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-25-30