



OptiClip 600 3000K C8 WH CC WHITE

Item No: 0044008

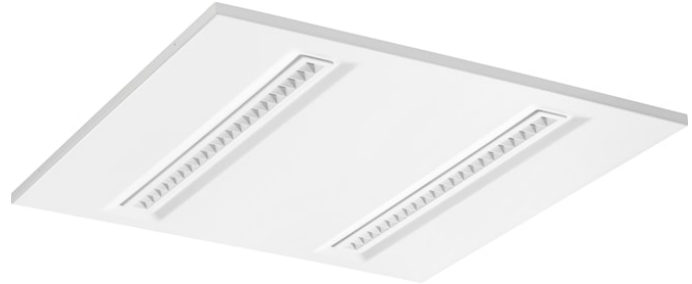


PROTM

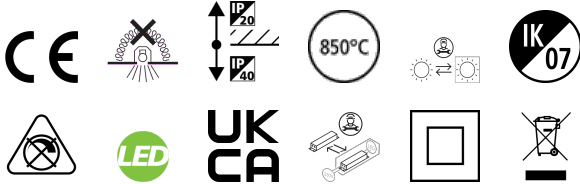

OPTICLIP 600 3000K C8 WH CC WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, Constant Current driver, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Technical Assets

Dimensions (mm)

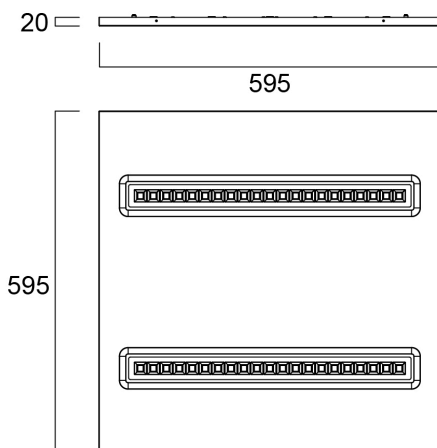

Photometrics

| Distance (m) | Cone diameter (m) | Beam diameter (m) | Beam angle (°) | Beam angle (°) | Illuminance (lx) |
|--------------|-------------------|-------------------|----------------|----------------|------------------|
| 0.5 | 0.84 0.82 | 0.77 | 40.1° | 39.8° | 7270 1830 |
| 1.0 | 1.68 1.65 | 1.54 | 40.1° | 39.8° | 1830 458 |
| 1.5 | 2.52 2.47 | 2.31 | 40.1° | 39.8° | 809 198 |
| 2.0 | 3.37 3.30 | 3.17 | 40.1° | 39.8° | 485 122 |
| 2.5 | 4.21 4.12 | 3.91 | 40.1° | 39.8° | 291 73 |
| 3.0 | 5.05 4.95 | 4.75 | 40.1° | 39.8° | 202 51 |

Distance (m) Cone diameter (m) Illuminance (lx)
 — C0 - C180 (Half beam angle: 78.9°)
 — C90 - C270 (Half beam angle: 80.2°)

