


# START Waterproof Tubular 1200 IP66 3900lm 830 PC

Item No: 0047157

**SYLVANIA**


**START**<sup>TM</sup>

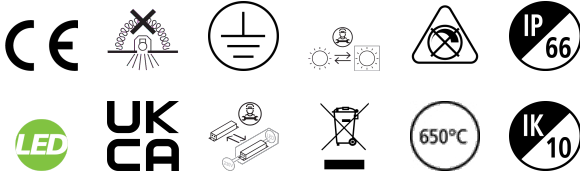


START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. UV resistant Polycarbonate housing; 3000K; 35W; 3900lm; 111lm/W and lumen maintenance L70:B50 of 68,000 hours lifetime. IP66; IK10; Class I; 1190mm x 62mm. Can be suspended with additional accessory (SKU 0046035).

## Technical Assets

### Dimensions (mm)

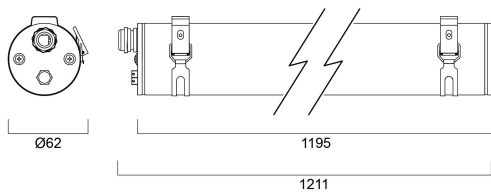

### Photometrics

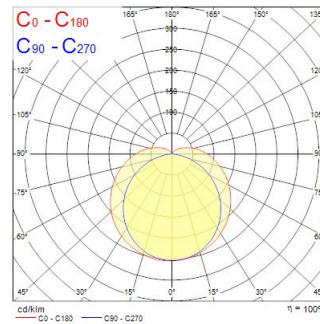

# START Waterproof Tubular 1200 IP66 3900lm 830 PC

Item No: 0047157

**SYLVANIA**

## General data

Product name	START Waterproof Tubular 1200 IP66 3900lm 830 PC
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate, Polyester
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+50°C
Virtual assistant compatibility	N/A
ETIM Class	EC000109
E-number FI	4357128
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	19
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	31
Max. products per 20A C Breaker	39
Max. products per 10A B Breaker	11
Max. products per 13A B Breaker	15
Max. products per 16A B Breaker	19
Max. products per 20A B Breaker	23
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Lifetime data

Lifespan L70 B50	68000
Lifespan L80 B50	50000
Lifespan L80 B20	42800

# START Waterproof Tubular 1200 IP66 3900lm 830 PC

Item No: 0047157



## Physical data

Housing colour	White
IP rating	IP66
IK rating	IK10
Nominal Product Length (mm)	1190
Nominal Product Diameter (mm)	62
Weight (kg)	1.24

## Packaging

Product EAN number	5410288471570
Packaging single length / height (cm)	127.5
Packaging single width (cm)	7.7
Packaging single depth (cm)	7.7
DUN14 (inner)	15410288471577
Units per outer package	6
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	25.1
Packaging outer depth (cm)	17.8

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-25-50